

GROVE

GMK7550

features

- 550 USt (450 t) capacity
- 197 ft (60 m) 5 section full power boom
- Patented TWIN-LOCK™ boom pinning system
- 82 ft - 240 ft (25 m - 73 m) lattice luffing jib
- 39 ft - 230 ft (12 m - 70 m) fixed lattice jib
- 430 ft (131 m) overall tip height
- Grove MEGAFORM boom
- New control console with EKS5 and ECOS
- Right side mounted cab stows to the rear
- Superstructure cab tilts up to approx 20°
- 264,500 lbs (120 t) hydraulically installed/removed counterweight
- 255 hp (190 kW) Mercedes OM906LA diesel, water cooled superstructure engine
- 563 hp (420 kW) Mercedes, diesel, water-cooled turbocharged carrier engine
- 53 mph (85 km/h) travel speed
- Boom removal and trailing boom kits (less dolly)
- Self removable rear outrigger box
- Optional 8th axle
- MEGATRAK™ independent suspension system



contents

Features	2
Specifications	3
Dimensions	5
Jib Dimensions	6
Counterweight Dimensions	8
Travel Proposals	9
Main Boom Range/Charts	11
Luffing Jib Range/Charts	14
Fixed Lattice Extension	25
Special Offset Fixed Lattice Extension	28
Heavy Duty Jib Extension	31

Manitowoc

www.manitowoc.com

All Terrain Crane

features

2



The operator's cab on the GMK7550 uses the new EKS5 LMI system and ECOS (Electronic Crane Operating System) with a combined dual screen display mounted on a tiltable swing arm.




The Mercedes OM 502 LA, 8 cylinder carrier engine provides 563 (420 kW) horsepower.




The superstructure is powered by a Mercedes OM906 LA 6 cylinder 255 horsepower (190 kW) engine.



The new superstructure cab stows to the rear and swings hydraulically to the right side of the crane for operation. Stationary heating and A/C are standard.

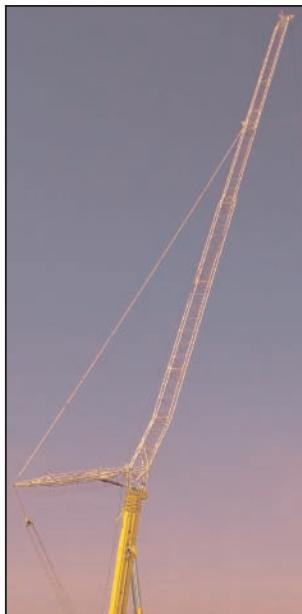


A sturdy 240 ft. (73 m) luffing jib on 179 ft. (54,6 m) of main boom provides up to 410 ft. (125 m) max tip ht with approximately 295 ft. (90 m) of working radius.

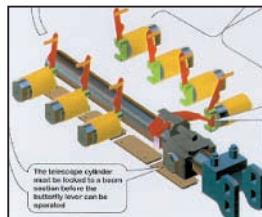

The TWIN-LOCK boom pinning system - a Grove patented design - runs inside a five section MEGAFORM boom.



The exclusive Grove MEGATRAK™ independent suspension system allows all wheels to be on the ground at all times; now with top steering on rear axles.

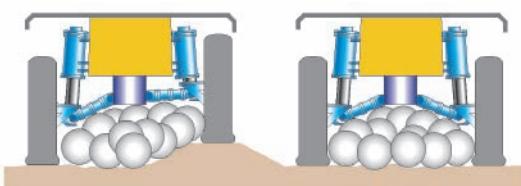

The rear outrigger box can be removed and replaced with an 8th axle for travel situations demanding additional axle weight distribution, (shown below with optional aluminum wheels).

GMK7550

GROVE

specifications

3

Superstructure

Boom

53 ft. - 197 ft. (16 m - 60 m) five section, full power boom with patented TWIN-LOCK™ boom pinning system. Maximum tip height: 207 ft. (63 m).

Boom Elevation

Two lift cylinders with safety valves provide boom angles from -3° to +82°.

Lattice Jib

Luffing jib is a lattice design with lengths of 82 ft. -240 ft. (25 m - 73 m) in sections of 20 ft. (6 m). The luffing jib converts to a fixed offset lattice jib providing lengths of 39 ft. -230 ft. (12 m - 70 m) offsettable at 3° and 25°.

Load Moment & Anti-Two Block System

Graphic display load moment and anti-two block system with audio/visual warning and control lever lockout. These systems provide electronic display of boom angle, length, radius, tip height, relative load moment, maximum permissible load, load indication and warning of impending two-block condition.

Cab

All aluminum construction cab is tilttable (approximately 20°) and includes safety glass and adjustable operator's seat with hydraulic suspension. Other features include engine dependent hot water heater, air conditioning, armrest integrated crane controls, and ergonomically arranged instrumentation. Cab hydraulically stows to the rear of the superstructure for highway travel.

Swing

3 axial piston fixed displacement motors provide swing speed of 0 - 1 RPM thru planetary gear box. Also provided is a spring applied, hydraulically released automatic swing brake with foot operated release for free swing.

Counterweight

264,500 lbs. (120 Tonnes) consisting of various sections with hydraulic installation/removal system (see counterweight configuration on page 8).

Engine

Mercedes OM906LA, diesel, 6 cylinders, water cooled, turbocharged, 255 HP (190 kW) at 1800 rpm. Max. torque: 811 ft./lbs. (1100 Nm) at 1300 rpm. Engine emission: EUROMOT/EPA/CARB (off highway).

Fuel Tank Capacity

79 gal. (300 L).

Hydraulic System

5 separate circuits, 3 axial piston variable displacement pumps with electronic power limiting control, 1 axial piston variable displacement pump for slewing and 1 fixed displacement pump for auxiliary gears. Standard thermostatically controlled oil cooler keeps oil at optimum operating temperature. Tank capacity: 428 gal. (1620 L)

Control system

Full electronic control of all crane movements is accomplished using electrical control levers with automatic reset to zero. Controls are integrated with the LMI and engine management system by CAN-BUS.

Hoist

Main and auxiliary hoist are powered by axial piston variable displacement motor with planetary gear and brake. "Thumb-thumper" hoist drum rotation indicator alerts operator of hoist movement.

	Main Auxiliary	Auxiliary
Line length:	1509 ft. (460 m)	2,264 ft. (690 m)
Rope diameter:	24 mm	24 mm
Line speed:	443 ft/min (135 m/min)	443 ft/min (135 m/min)
Line pull:	24,729 lbs. (110 kN)	24,729 lbs. (110 kN)

Electrical system

24 V system with three-phase alternator 28 V/100 A
2 batteries 12 V/170 Ah.

* Optional equipment

- * Engine-independent hot water heater, with engine pre-heater
- * Second spotlight
- * Stereo/CD player
- * Lift enhancement system
- * 360° positive swing lock

* Denotes optional equipment

GMK7550

GROVE

specifications

4

Carrier

Chassis

Special 7 axle carrier, welded torsion resistant frame is fabricated from high-strength steel.

Outrigger System

Hydraulic two-stage outrigger beams are extended by a single hydraulic cylinder and two cables. Outriggers can adjust to two positions:

- Fully extended (100%) - 29' 2" (8.9 m)
- Partially extended (50%) - 20' (6.1 m)

Four 32 in. x 32 in. (810 mm x 810 mm), self stowing, steel outrigger pads provide rigid lifting base. Outrigger controls are located on both sides of the carrier. Electronic level indicators are located next to each outrigger control box. Outrigger pad load indication through ECOS and carrier controls.

Engine

Mercedes, diesel, 8 cylinders, water-cooled, turbocharged, 563 HP (420 kW) at 1800 rpm. Max. torque: 1991 ft. lbs. (2700 Nm) at 1080 rpm. Engine emission: EPA/CARB (non highway).

Fuel Tank Capacity

132 gal. (500 L).

Transmission

Allison automatic HD 4076, 7 forward and 1 reverse speed. Transfer case with 2 speeds and inter-axle differential lock.

Drive/Steer

14 x 6 x 14.

Axles

7 axles. 1, 4 and 5 are drive/steer. Axles 2, 3, 6 and 7 are steer only.

Suspension

GMK7550 features the Grove exclusive MEGATRAK™ suspension. This revolutionary design features an independent hydronematic system with hydraulic lockout acting on all wheels. The suspension can be raised 6-1/2" (170 mm) or lowered 5" (130 mm) both longitudinally and transversely and features an automatic leveling system for on-highway travel.

Tires

14 tires, 16.00 R25.

Steering

Dual circuit steering system is hydraulic power assisted with emergency steering pump. Axles 1, 2, 3, 6 and 7steer on highway.

Separate steering of the 4th, 5th, 6th and 7th axles for all wheel steer and crab-steer, controlled by an electric rocker switch.

Brakes

A dual circuit air system operates on all wheels with a spring-applied, air released parking brake acting on axles 2, 4, 5 and 7. An air dryer is fitted to remove moisture from the air system. Standard engine compression brake and transmission retarder.

Cab

Two-man, aluminum construction driver's cab includes the following features: safety glass; driver and passenger seats with hydraulic suspension, engine-dependent hot water heater and air conditioning. Complete instrumentation and driving controls.

Electrical System

24 V system with three-phase alternator 28 V/100 A, 2 batteries 12 V/170 Ah.

Maximum Speed

53 mph (85 km/h) with 20.5 R25 tires.

Gradeability (theoretical)

32% with 20.5 R25 tires. (14x6x14)
50% with 20.5 R25 tires. (14x8x14)

Miscellaneous Standard Equipment

Boom removal kit; trailing boom kit (less dolly), additional hydraulic oil cooler; removable rear outrigger box, spare tire and wheel; tool kit; fire extinguisher; radio/cassette player in carrier cab.

* Optional Equipment

- * 14 x 8 x 14 (1,2,4 and 5 are drive/steer)
- * Engine-independent hot water heater, with engine pre-heater
- * Tachograph



* Denotes optional equipment

GMK 7550


GROVE

dimensions

5

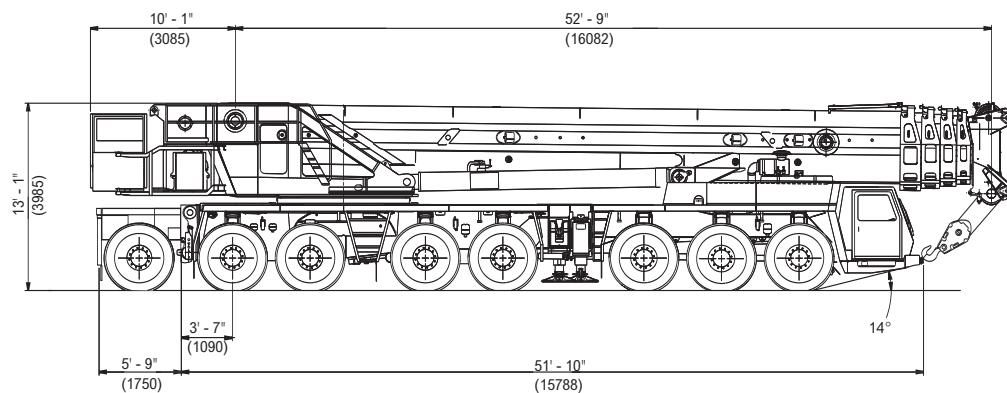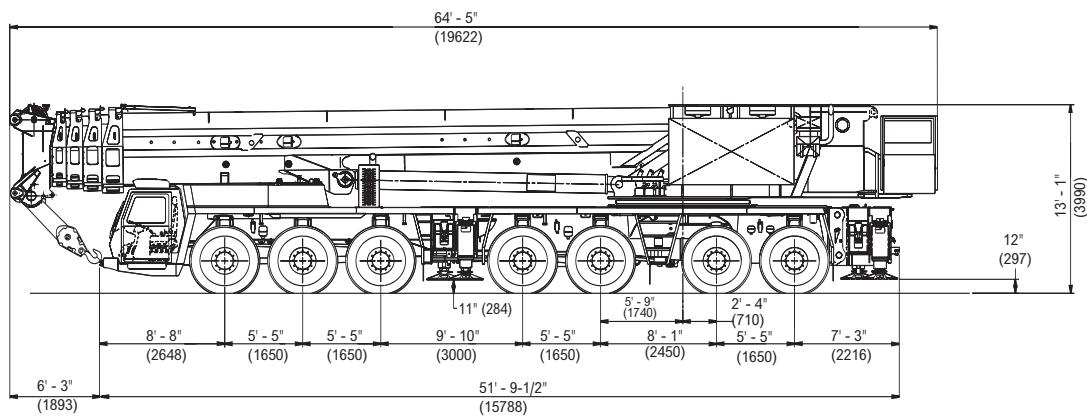

Shown with
8th axle

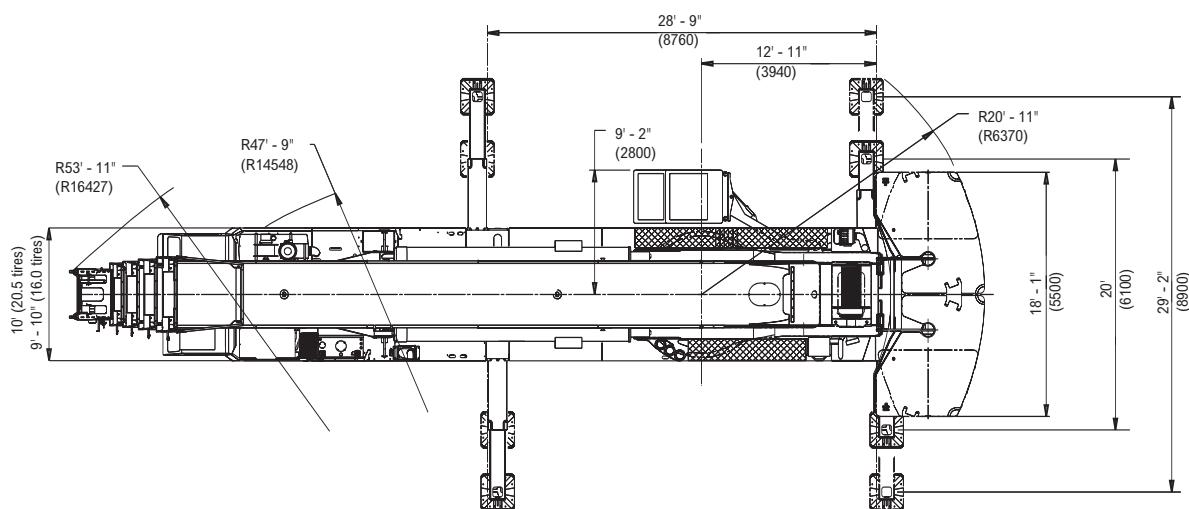


Grove

dimensions

Luffing jib combinations

without angle offset

6

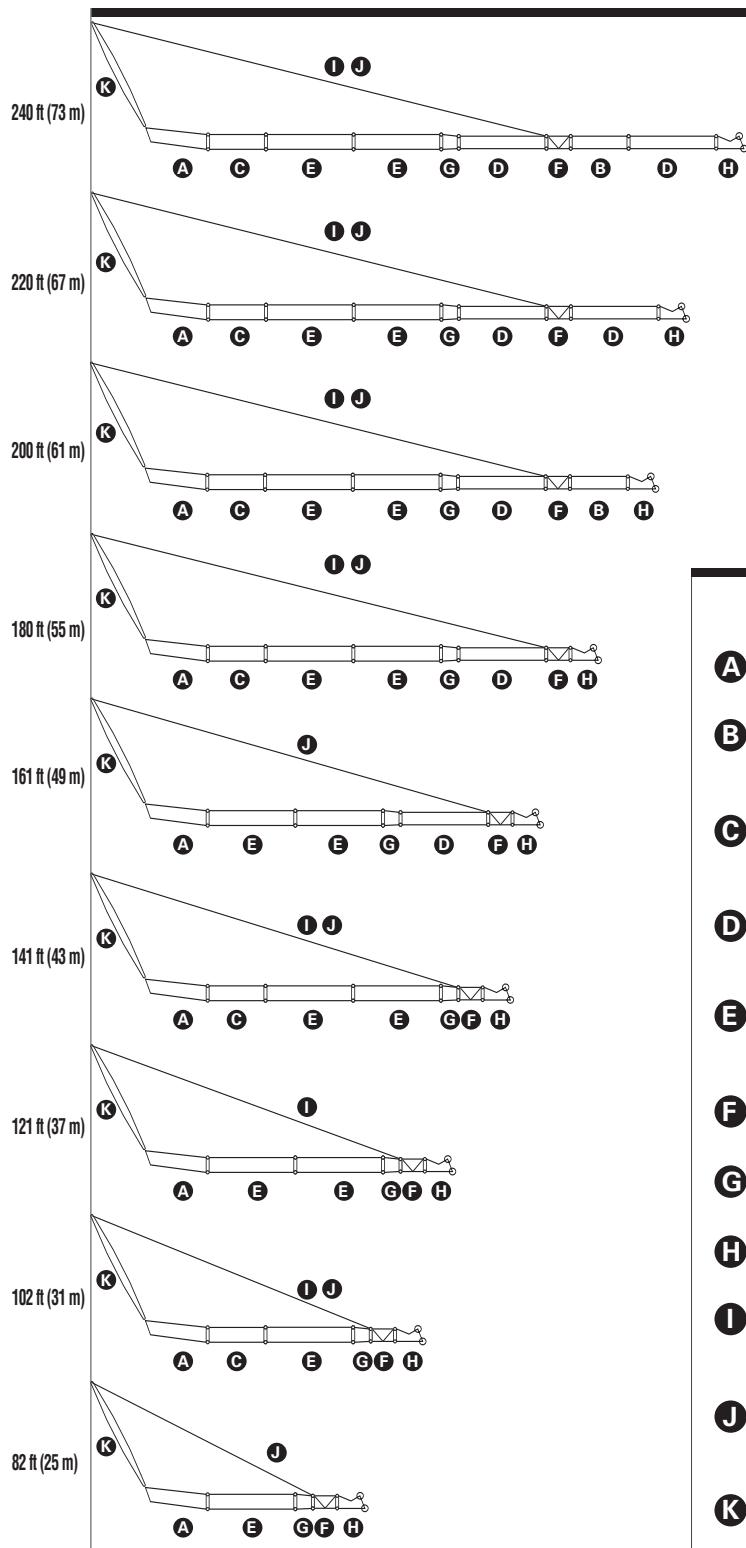

Description	Length x width x height in ft (m)	Weight in lbs. (m)
A Foot Section	28.87 x 5.90 x 8.20 (8.80 x 1.80 x 2.50)	8 160 (3 700)
B Short intermediate sections, small cross-section, each	20.34 x 4.91 x 4.91 (6.20 x 1.50 x 1.50)	1 985 (900)
C Short intermediate sections, large cross-section, each	20.34 x 5.90 X 6.23 (6.20 x 1.80 x 1.90)	2 205 (1 000)
D Long intermediate sections, small cross-section, each	40.03 x 4.91 x 4.91 (12.20 x 1.50 x 1.50)	3 530 (1 600)
E Long intermediate sections, large cross-section, each	40.03 x 5.90 x 6.23 (12.20 x 1.80 x 1.90)	3 530 (1 600)
F Angle piece	12.14 x 4.91 x 5.90 (3.70 x 1.50 x 1.80)	3 530 (1 600)
G Reducing piece	3.94 x 5.90 x 6.23 (1.20 x 1.80 x 1.90)	1 105 (500)
H Head piece	10.50 x 4.91 x 6.89 (3.20 x 1.50 x 2.10)	2 650 (1 200)
I Rear pendant link for short intermediate section	20.34 x 0.70 x 0.70 (6.20 x 0.20 x 0.20)	440 (200)
J Rear pendant link for long intermediate section	40.03 x 0.70 x 0.70 (12.20 x 0.20 x 0.20)	880 (400)
K Luffing control arm with fall-back guard strut	40.03 x 6.89 x 5.90 (12.20 x 2.10 x 1.80)	*7 055 (3 200)

* Individual weight of rear pendant link: 795 lbs. (360 kg)

GMK 7550


GROVE

dimensions

Lattice boom extension combinations

without angle offset

7

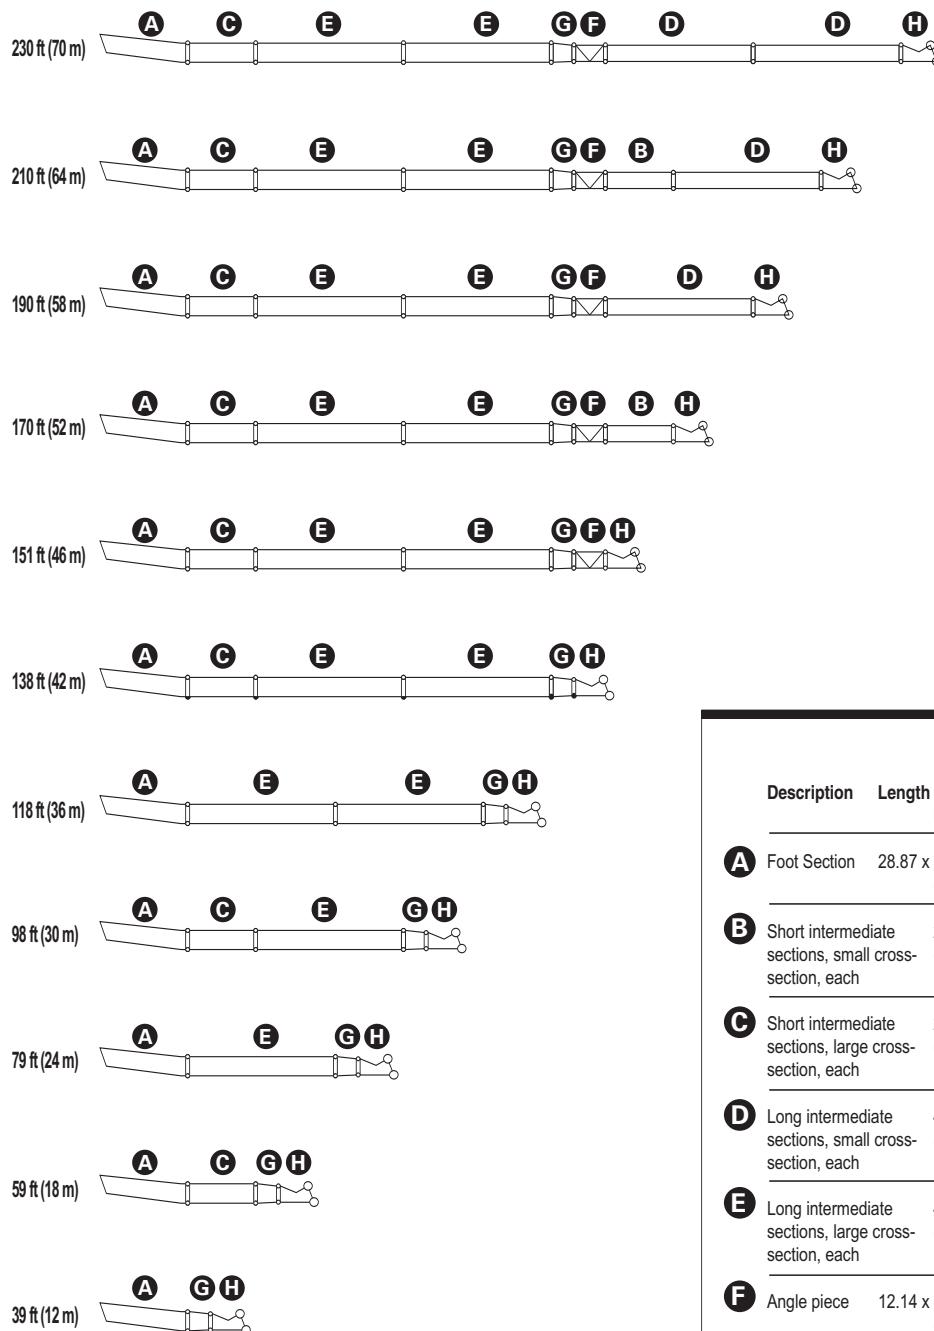

	Description	Length x width x height in ft (m)	Weight in lbs. (m)
A	Foot Section	28.87 x 5.90 x 8.20 (8.80 x 1.80 x 2.50)	8 160 (3 700)
B	Short intermediate sections, small cross-section, each	20.34 x 4.91 x 4.91 (6.20 x 1.50 x 1.50)	1 985 (900)
C	Short intermediate sections, large cross-section, each	20.34 x 5.90 X 6.23 (6.20 x 1.80 x 1.90)	2 205 (1 000)
D	Long intermediate sections, small cross-section, each	40.03 x 4.91 x 4.91 (12.20 x 1.50 x 1.50)	3 530 (1 600)
E	Long intermediate sections, large cross-section, each	40.03 x 5.90 x 6.23 (12.20 x 1.80 x 1.90)	3 530 (1 600)
F	Angle piece	12.14 x 4.91 x 5.90 (3.70 x 1.50 x 1.80)	3 530 (1 600)
G	Reducing piece	3.94 x 5.90 x 6.23 (1.20 x 1.80 x 1.90)	1 105 (500)
H	Head piece	10.50 x 4.91 x 6.89 (3.20 x 1.50 x 2.10)	2 650 (1 200)


GMK 7550

GROVE

counterweight

264,500 lbs.

8

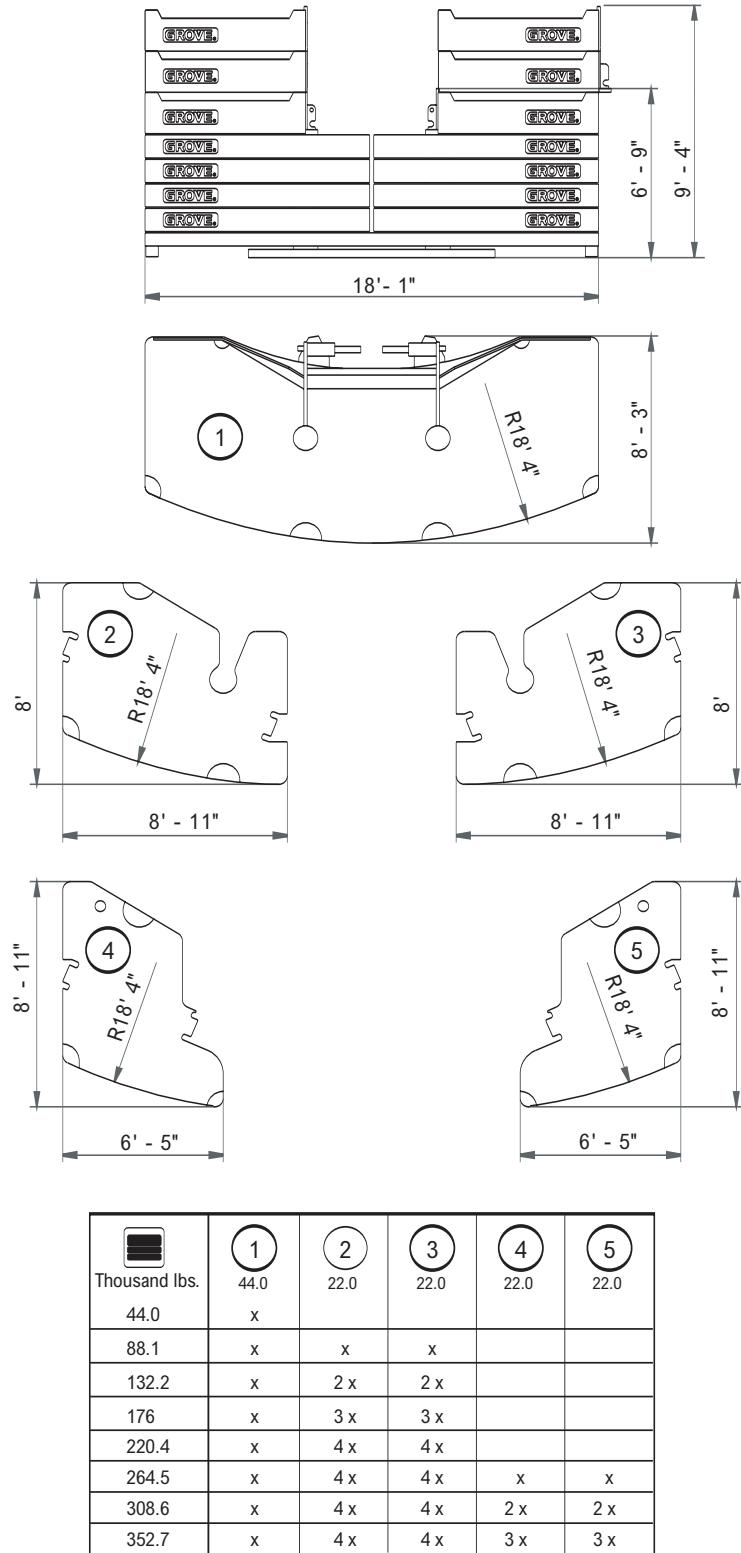


GMK 7550

GROVE

travel proposals

9

Trailing boom dolly with 8th axle

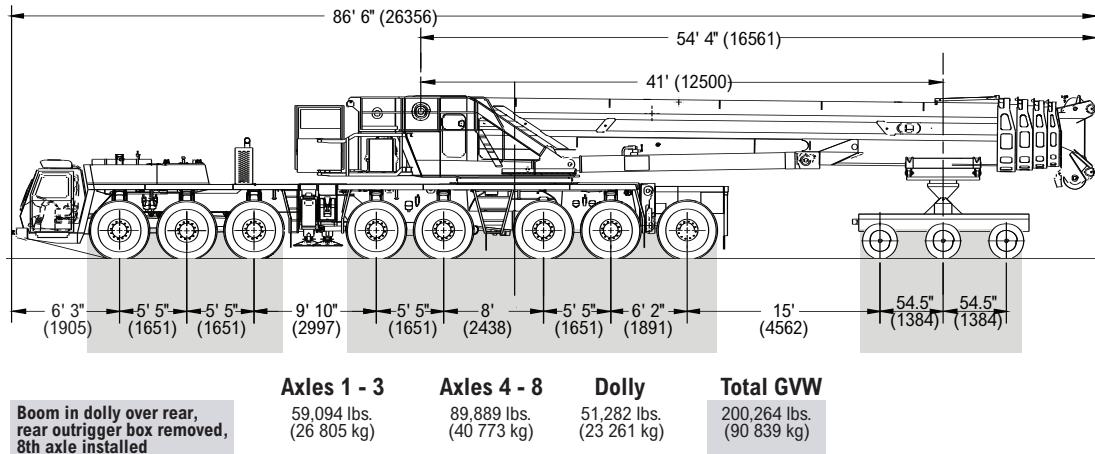


Unit equipped with:

- 20.5 tires on aluminum rims - axles 1 through 8
- Operator, 165 lbs. (75 kg)
- Welded on MEGAWINGLIFT hardware
- Dolly weight: 8,600 lbs. (3900 kg)

Allow 2% variation in weight due to manufacturing tolerances

Boom removed, superstructure over rear

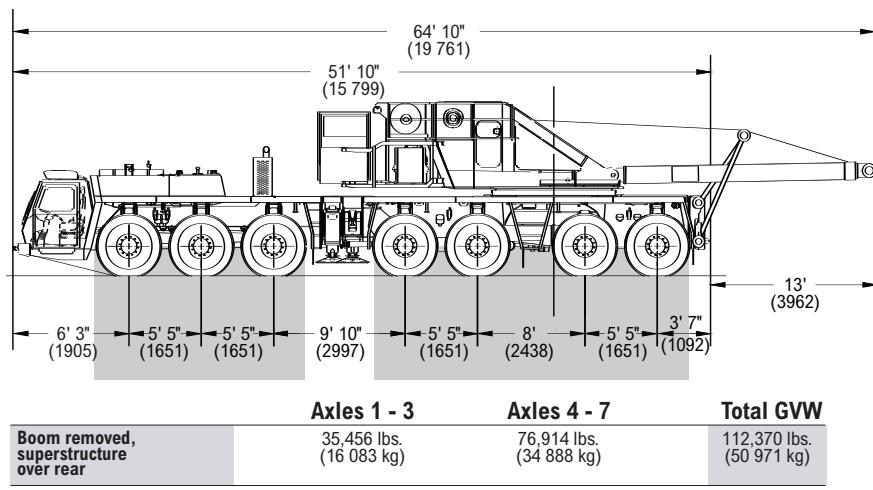

Unit equipped with:

- Rear outrigger box removed
- 20.5 tires on aluminum rims
- Operator, 165 lbs. (75 kg)


Allow 2% variation in weight due to manufacturing tolerances

GMK 7550

GROVE

travel proposals

10

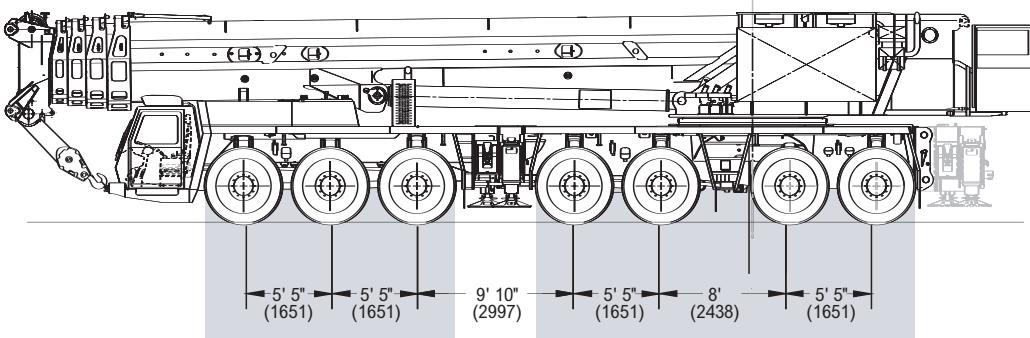


	Axes 1 - 3	Axes 4 - 7/8	Total GVW
Boom over front, rear outrigger box removed	81,768 lbs. (37 090 kg)	104,741 lbs. (47 510 kg)	186,509 lbs. (84 600 kg)
Boom over front, rear outrigger box installed	73,032 lbs. (33 127 kg)	128,311 lbs. (58 202 kg)	201,343 lbs. (91 329 kg)
Boom over front, 8th axle installed	94,607 lbs. (42 914 kg)	97,053 lbs. (44 023 kg)	191,661 lbs. (86 937 kg)

Unit equipped with:

- 20.5 tires on aluminum rims
- Operator, 165 lbs. (75 kg)
- Welded on MEGAWINGLIFT hardware

Allow 2% variation in weight due to manufacturing tolerances

Trailing boom (spread dolly) with axles 3 & 6 raised

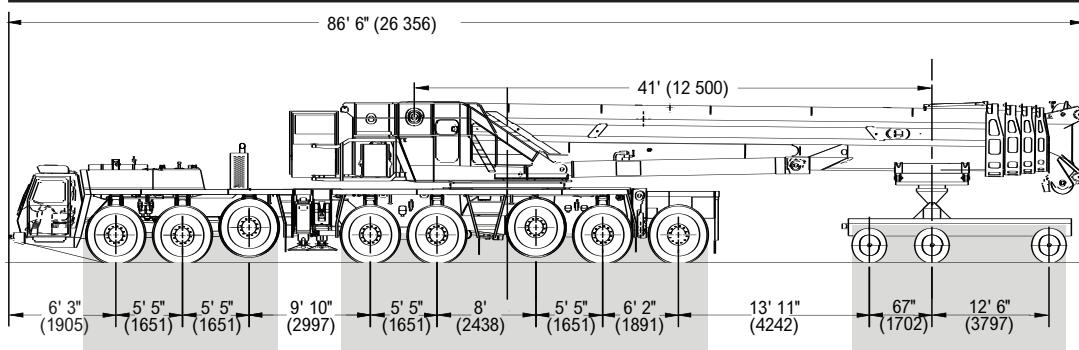

	Axes 1 - 2	Axes 4, 5, 7, 8	Dolly	Total GVW
Boom in dolly over rear, rear outrigger box removed, 8th axle installed, axles 3 & 6 raised	53,793 lbs. (24 400 kg)	95,184 lbs. (43 175 kg)	52,687 lbs. (23 900 kg)	201,664 lbs. (91 475 kg)

Unit equipped with:

- 20.5 tires on aluminum rims - axles 1 through 8
- Operator, 165 lbs. (75 kg)
- Welded on MEGAWINGLIFT hardware
- 3 axle dolly (10,000 lbs. [4563])

Allow 2% variation in weight due to manufacturing tolerances


GMK 7550

GROVE

working range

197 ft Main Boom

11

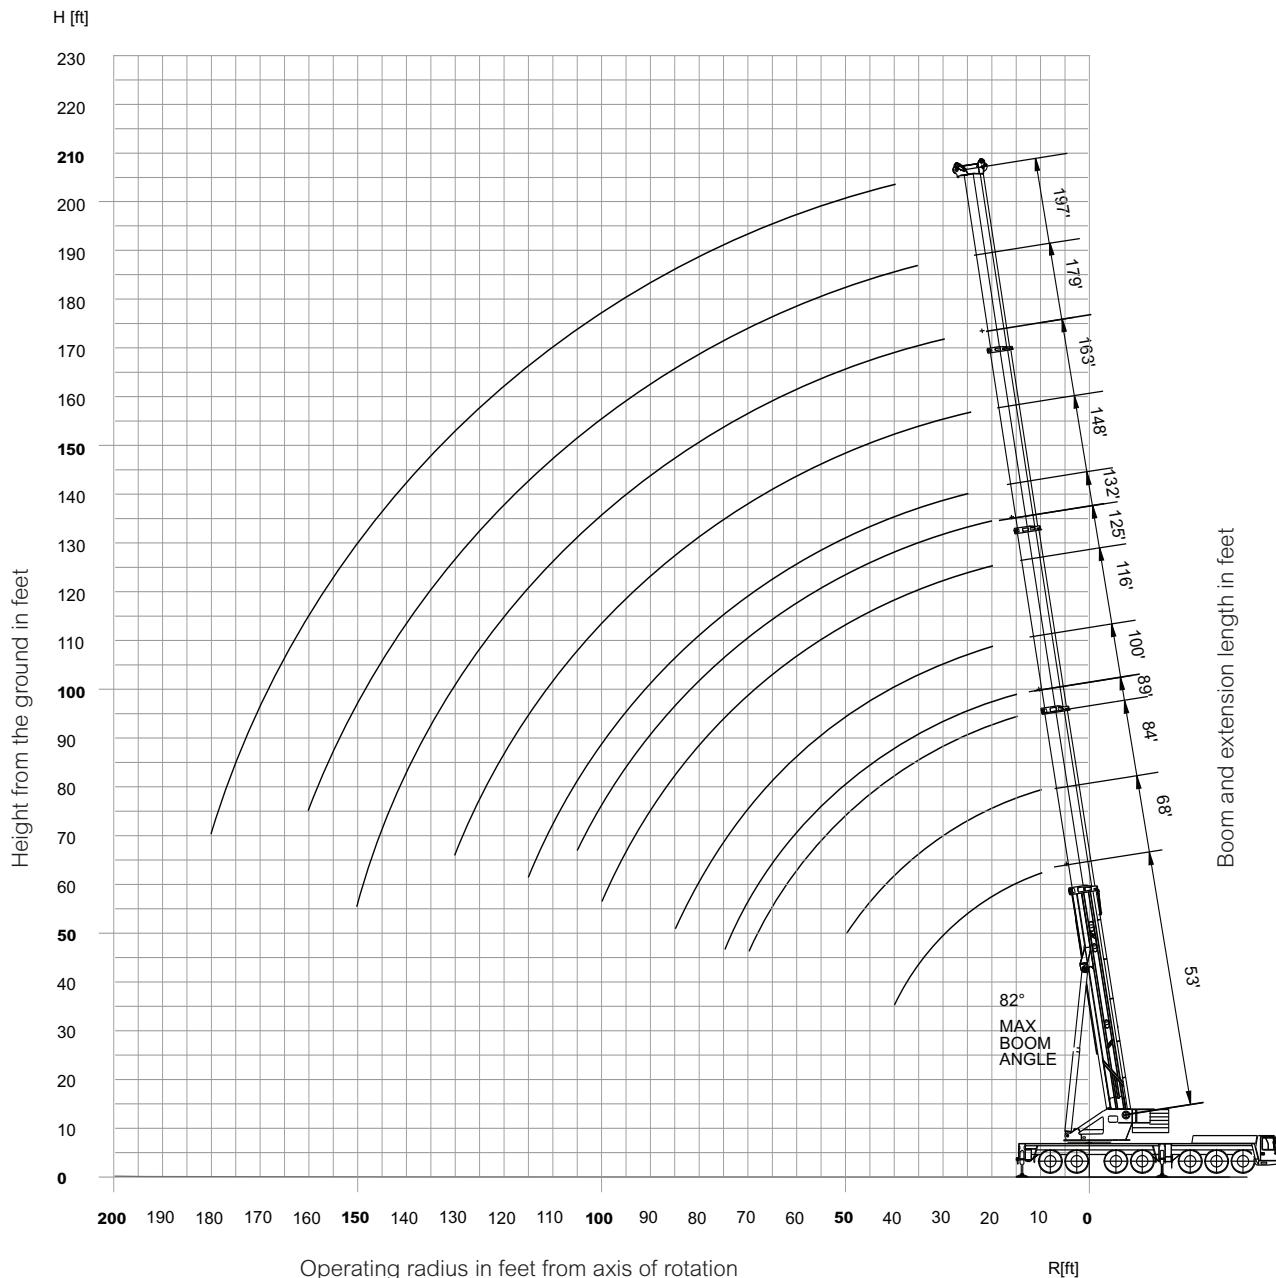

GMK 7550

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE. The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.

GROVE

Working Range w/MegaWingLift

197 ft. Main Boom


14

GMK7550 w/MWL

Height from the ground in feet

Boom and extension length in feet

Operating radius in feet from axis of rotation

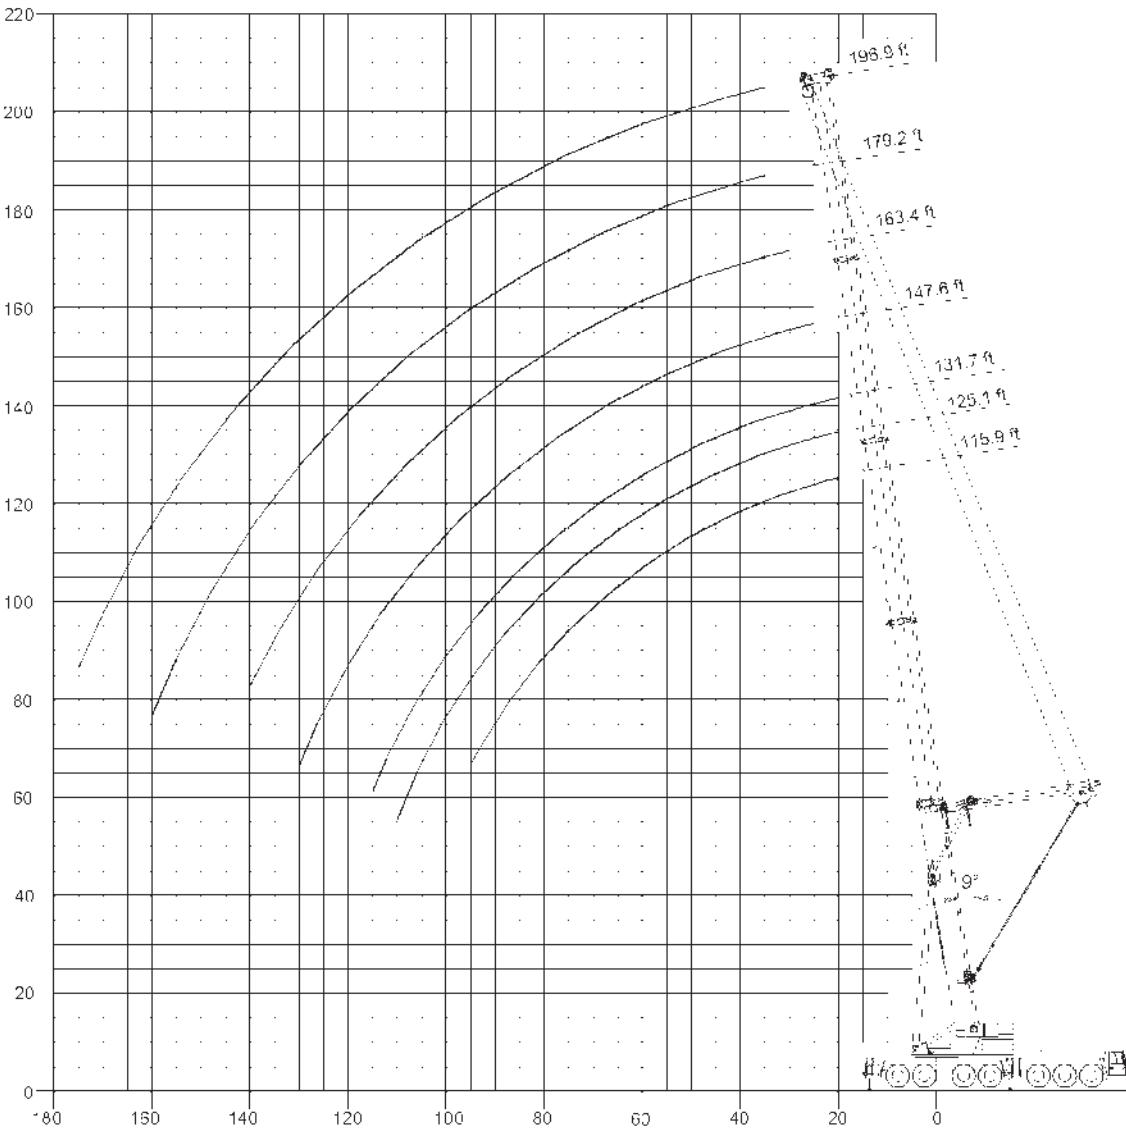

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE. The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.

GROVE

load charts w/MegaWingLift

 116-197 ft.
 352,700 lbs.
 100%
29'-2" spread
 360°



Feet	Pounds (thousands)						
	116'	125'	132'	148'	163'	179'	197'
20	352.0	270.0	330.0				
25	324.0	254.0	310.0	298.0			
30	298.0	242.0	280.0	268.0	222.0	213.0	
35	274.0	230.0	258.0	244.0	211.0	200.0	167.0
40	242.0	219.0	240.0	226.0	200.0	186.0	158.0
45	222.0	209.0	219.0	212.0	190.0	175.0	149.0
50	200.0	195.0	197.0	193.0	181.0	164.0	142.0
55	182.0	180.0	181.0	175.0	172.0	154.0	134.0
60	166.0	167.0	166.0	163.0	161.0	146.0	127.0
65	153.0	153.0	153.0	152.0	147.0	138.0	121.0
70	140.0	141.0	140.0	139.0	138.0	130.0	115.0
75	129.0	130.0	129.0	128.0	127.0	124.0	110.0
80	120.0	120.0	120.0	119.0	118.0	116.0	104.0
85	111.0	112.0	111.0	110.0	109.0	108.0	100.0
90	104.0	104.0	104.0	103.0	102.0	100.0	96.0
95	97.0	97.0	97.0	96.0	95.0	93.0	91.0
100		91.0	91.0	90.0	89.0	87.0	87.0
105		86.0	85.0	84.0	83.0	82.0	82.0
110		73.0	80.0	79.0	78.0	77.0	77.0
115			71.0	75.0	73.0	72.0	72.0
120				70.0	69.0	68.0	68.0
125				67.0	65.0	63.0	64.0
130					58.0	60.0	60.0
135					58.0	56.0	56.0
140					54.0	53.0	53.0
145						49.0	50.0
150						46.0	47.0
155						43.6	44.0
160						38.4	41.4
165							39.0
170							36.8
175							33.8

15

GMK7550 w/MWNL

load charts w/MegaWingLift

 116-197 ft.

 264,500 lbs.

 100%
29'-2" spread

 360°

16

	Pounds (thousands)						
Feet	116'	125'	132'	148'	163'	179'	197'
20	352.0	270.0	330.0				
25	324.0	254.0	310.0	298.0			
30	298.0	242.0	280.0	268.0	222.0	213.0	
35	260.0	230.0	258.0	244.0	211.0	200.0	167.0
40	236.0	219.0	232.0	226.0	200.0	186.0	158.0
45	208.0	204.0	206.0	202.0	190.0	175.0	149.0
50	185.0	186.0	186.0	185.0	180.0	164.0	142.0
55	167.0	167.0	167.0	166.0	165.0	154.0	134.0
60	151.0	152.0	151.0	150.0	149.0	146.0	127.0
65	137.0	138.0	138.0	137.0	136.0	134.0	121.0
70	125.0	126.0	125.0	124.0	123.0	122.0	115.0
75	115.0	115.0	115.0	114.0	112.0	111.0	110.0
80	104.0	105.0	104.0	103.0	102.0	100.0	100.0
85	94.0	95.0	95.0	93.0	92.0	90.0	91.0
90	86.0	87.0	86.0	85.0	84.0	82.0	83.0
95	79.0	80.0	79.0	78.0	77.0	75.0	76.0
100		74.0	73.0	72.0	71.0	69.0	69.0
105		68.0	67.0	66.0	65.0	63.0	64.0
110		63.0	63.0	61.0	60.0	58.0	59.0
115			58.0	57.0	56.0	54.0	54.0
120				53.0	52.0	50.0	50.0
125				49.0	48.0	46.0	46.0
130					46.0	45.0	42.8
135						41.4	39.6
140						38.6	36.8
145							34.2
150							31.8
155							29.6
160							27.6
165							25.8
170							23.8
175							22.2

GMK 7550 w/MWL


GROVE

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE. The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.

working range

Length and Type of Boom

17

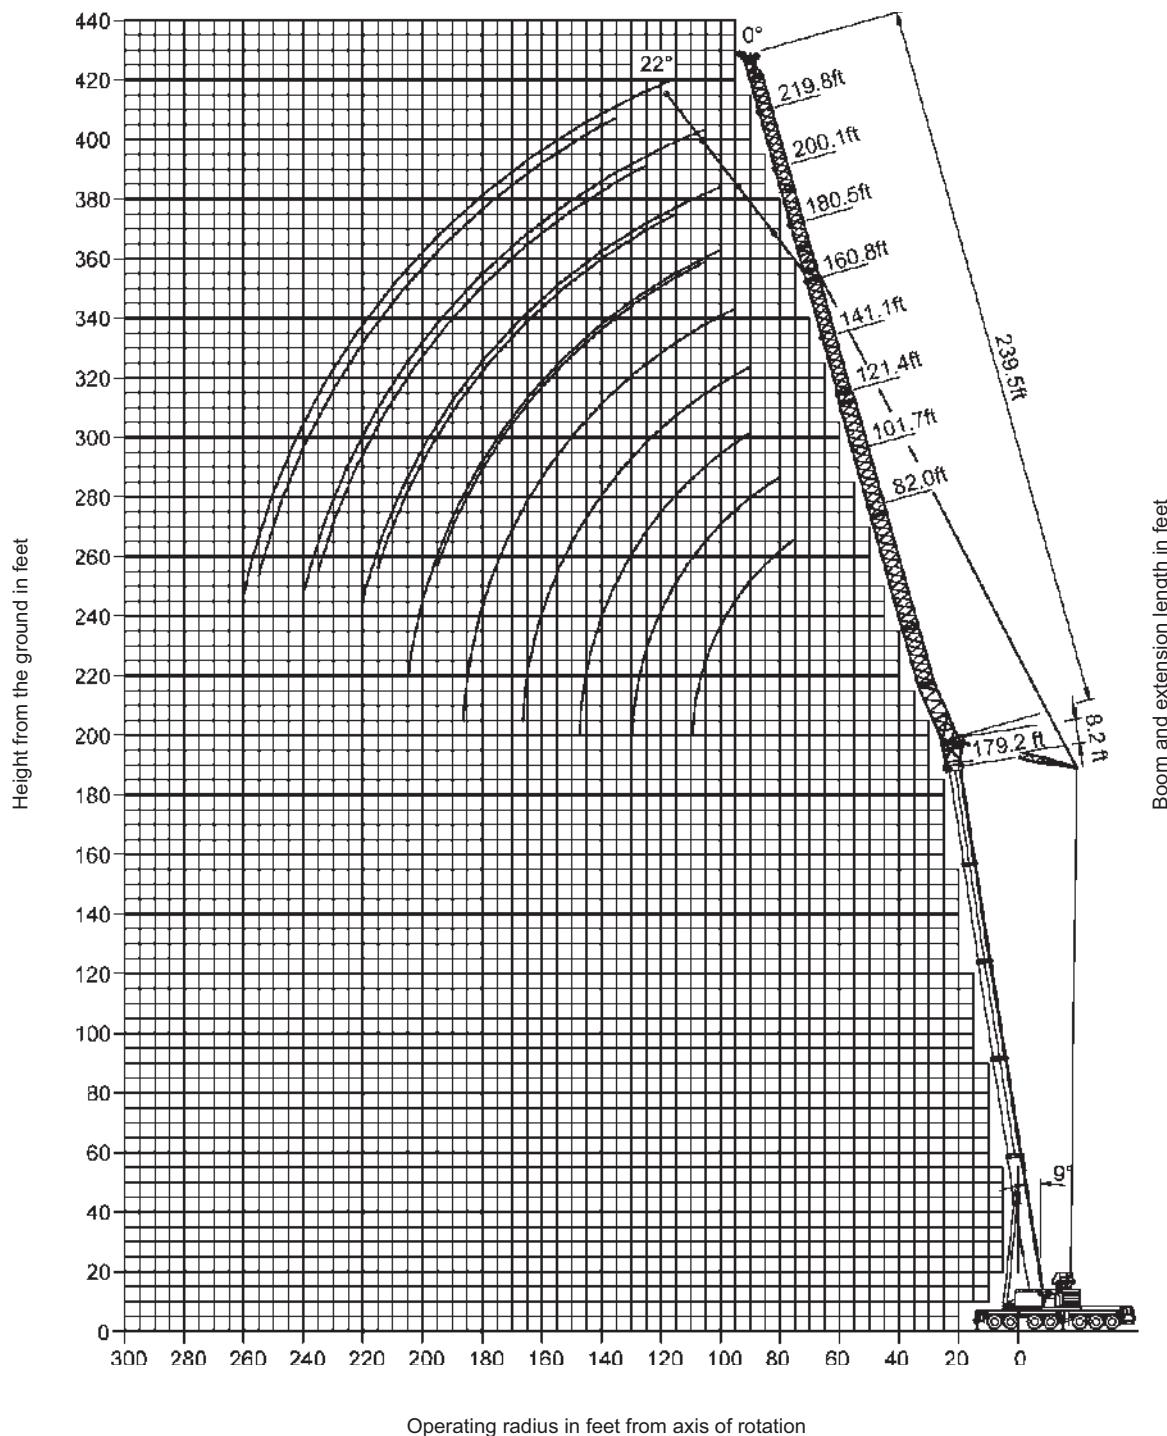

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE. The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.

GROVE

GMK 7550

load charts

18



81°
52.6 ft.



82-240 ft.



100%
29' 2" Spread



360°



264,500 lbs.

Feet	82	101.7	121.4	141.1	160.8	180.5	200.1	219.8	239.5
40	169.0	144.0							
45	160.0	140.0							
50	151.0	136.0	114.0	92.0					
55	142.0	132.0	111.0	91.0					
60	134.0	129.0	109.0	89.0	73.0				
65	128.0	125.0	106.0	88.0	72.0				
70	118.0	122.0	104.0	86.0	70.0	56.0	42.6		
75	102.0	118.0	102.0	84.0	69.0	54.0	41.4	32.6	
80	86.0	108.0	99.0	83.0	67.0	53.0	40.4	31.6	23.4
85	70.0	96.0	96.0	81.0	65.0	52.0	39.2	30.8	22.8
90		86.0	93.0	80.0	64.0	50.0	38.2	29.8	22.0
95		75.0	88.0	78.0	62.0	49.0	37.2	29.0	21.4
100		65.0	80.0	76.0	61.0	47.0	36.2	28.0	20.6
105			73.0	74.0	59.0	46.0	35.2	27.0	20.0
110				71.0	58.0	45.0	34.4	26.2	19.4
115				68.0	57.0	43.6	33.4	25.2	18.8
120				51.0	62.0	56.0	42.6	32.6	18.2
125					57.0	54.0	41.6	31.8	17.6
130					51.0	53.0	40.6	31.0	17.2
135					46.0	50.0	39.6	30.2	16.6
140						47.0	38.8	29.4	16.0
145						43.2	38.0	28.4	15.4
150						39.6	37.0	27.6	15.0
155						36.2	36.2	26.6	14.6
160							35.0	25.8	14.2
165							33.4	24.8	13.6
170							31.8	24.4	13.2
175							29.6	23.8	12.8
180								23.2	12.4
185								22.8	12.0
190								22.2	11.6
195								21.6	11.2
200									11.0
205									10.6
210									10.2
215									9.8
220									9.6
225									9.2
230									9.0
235									8.6



84.3 ft



82-240 ft.



100%
29' 2" Spread



360°



264,500 lbs.

Feet	82	101.7	121.4	141.1	160.8	180.5	200.1	219.8	239.5
40									
45	154.0								
50	145.0	125.0							
55	137.0	123.0	100.0						
60	129.0	120.0	99.0	79.0					
65	122.0	118.0	98.0	79.0					
70	117.0	116.0	97.0	79.0	63.0				
75	112.0	113.0	95.0	78.0	62.0	49.0	38.4		
80	107.0	111.0	93.0	77.0	61.0	48.0	37.6	29.6	
85	100.0	109.0	92.0	76.0	60.0	47.0	36.8	28.6	
90	81.0	105.0	90.0	75.0	59.0	46.0	36.0	27.8	21.0
95		98.0	89.0	74.0	58.0	45.0	35.0	26.8	20.4
100		87.0	88.0	73.0	57.0	44.0	34.2	26.0	20.0
105			75.0	87.0	72.0	55.0	43.2	33.6	25.0
110			62.0	81.0	71.0	54.0	42.2	32.8	24.4
115				75.0	70.0	53.0	41.4	32.0	23.8
120				67.0	69.0	52.0	40.6	31.2	23.2
125					68.0	51.0	39.8	30.6	22.6
130					64.0	50.0	39.0	29.8	22.0
135					59.0	48.0	38.0	29.2	21.4
140					53.0	47.0	37.4	28.6	21.0
145					45.0	36.6	27.8	20.4	15.2
150					43.6	35.8	27.2	20.0	14.8
155					42.2	35.2	26.4	19.4	14.4
160					40.6	34.4	25.8	18.8	14.0
165						33.6	25.0	18.4	13.6
170						33.0	24.2	18.0	13.2
175						32.4	23.4	17.6	12.8
180						31.8	22.8	17.0	12.4
185							22.4	16.6	12.0
190							22.0	16.2	11.6
195							21.4	15.8	11.2
200							21.0	15.4	10.8
205								15.0	10.6
210								14.6	10.2
215								14.2	9.8
220								13.8	9.6
225									9.2
230									9.0
235									8.6

GROVE

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE. The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.

load charts

81°
 82-240 ft.
 100%
 29' 2" Spread
 360°
 264,500 lbs.

Feet	82	101.7	121.4	141.1	160.8	180.5	200.1	219.8	239.5
45									
50	116.0								
55	113.0	99.0							
60	107.0	99.0	80.0						
65	102.0	95.0	80.0						
70	97.0	92.0	80.0	65.0					
75	93.0	88.0	79.0	65.0	51.0				
80	89.0	84.0	77.0	64.0	51.0	40.4	32.0		
85	85.0	80.0	75.0	64.0	50.0	39.8	31.6		
90	82.0	77.0	72.0	63.0	49.0	39.2	31.2	23.8	
95	79.0	74.0	70.0	62.0	49.0	38.8	30.6	23.4	18.4
100		72.0	67.0	61.0	48.0	38.2	30.2	23.0	18.0
105		69.0	65.0	60.0	47.0	37.6	29.6	22.6	17.4
110		67.0	62.0	58.0	47.0	37.2	29.2	22.2	17.0
115		64.0	60.0	56.0	46.0	36.6	28.6	21.6	16.6
120		58.0	55.0	45.0	36.0	28.2	21.2	16.2	
125		57.0	53.0	45.0	35.6	27.6	20.8	15.8	
130		55.0	52.0	44.0	35.0	27.2	20.4	15.4	
135			50.0	43.6	34.4	26.6	20.0	15.0	
140			49.0	43.0	33.8	26.0	19.4	14.6	
145			48.0	42.4	33.4	25.2	19.0	14.2	
150			47.0	41.8	32.8	24.6	18.6	14.0	
155				41.2	32.4	24.0	18.2	13.6	
160				40.6	31.8	23.6	17.8	13.2	
165					40.2	31.2	23.0	17.4	12.8
170					39.6	30.8	22.6	17.0	12.4
175						30.2	22.2	16.6	12.2
180						29.8	21.8	16.4	11.8
185						29.2	21.4	16.0	11.4
190						28.8	21.0	15.6	11.2
195							20.6	15.2	10.8
200							20.2	14.8	10.6
205							19.8	14.4	10.2
210								14.2	9.8
215								13.8	9.6
220								13.6	9.2
225								13.2	9.0
230									8.8
235									8.4
240									8.2

19

Feet	82	101.7	121.4	141.1	160.8	180.5	200.1	219.8	239.5
55									
60	86.0								
65	83.0								
70	79.0	70.0							
75	75.0	67.0	57.0	45.0					
80	71.0	65.0	57.0	45.0	37.2				
85	68.0	62.0	57.0	45.0	37.2				
90	65.0	60.0	55.0	45.0	37.2	29.8	23.2		
95	62.0	58.0	54.0	45.0	37.0	29.8	23.2	18.0	
100	59.0	56.0	52.0	45.0	36.8	29.4	23.2	18.0	13.6
105		53.0	50.0	45.0	36.4	29.2	22.8	18.0	13.6
110		52.0	49.0	45.0	36.2	29.0	22.6	17.8	13.6
115		50.0	47.0	44.0	36.0	28.8	22.4	17.6	13.4
120		49.0	46.0	42.6	35.8	28.6	22.2	17.4	13.2
125			44.0	41.2	35.4	28.2	22.0	17.2	13.0
130			43.0	40.0	35.2	28.0	21.6	16.8	12.8
135			41.8	38.8	35.0	27.8	21.4	16.6	12.6
140			40.4	37.6	34.6	27.6	21.2	16.4	12.2
145				36.4	33.8	27.2	20.8	16.2	12.0
150				35.4	33.2	27.0	20.6	15.8	11.8
155					34.4	32.4	26.8	20.4	15.6
160						31.8	26.4	20.0	15.4
165						31.0	26.0	19.8	15.0
170						30.2	25.6	19.6	14.8
175						29.2	25.4	19.2	14.6
180							25.0	19.0	14.4
185							24.6	18.8	14.0
190							24.4	18.4	13.8
195							24.0	18.2	13.6
200								18.0	13.2
205								17.6	13.0
210								17.4	12.8
215								17.2	12.6
220									12.2
225									12.0
230									11.8
235									11.6
240									7.6
245									7.4

GMK 7550

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE. The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.

GROVE

load charts

20



81°

163.4 ft.



82-240 ft.



100%
29' 2" Spread



360°



264,500 lbs.



GMK

7550

Pounds (thousands)

Feet	82	101.7	121.4	141.1	160.8	180.5	200.1	219.8	239.5
65									
70	67.0								
75	64.0	57.0							
80	62.0	57.0	45.0	37.0					
85	59.0	55.0	45.0	37.0					
90	57.0	53.0	45.0	37.0	29.2				
95	55.0	51.0	45.0	37.0	29.2	23.8	19.2		
100	53.0	50.0	45.0	37.0	29.2	23.8	19.2	14.6	
105	48.0	44.0	44.0	37.0	29.2	23.6	19.0	14.6	10.8
110	46.0	43.2	43.2	37.0	29.2	23.6	19.0	14.6	10.8
115	45.0	41.8	41.8	37.0	29.2	23.4	18.8	14.4	10.8
120	43.4	40.6	36.6	29.2	23.2	18.6	14.4	10.8	
125		39.2	35.8	29.2	23.2	18.6	14.2	10.6	
130		38.0	34.8	29.2	23.0	18.4	14.0	10.4	
135		36.8	34.0	29.2	22.8	18.2	13.8	10.2	
140		35.8	33.0	28.8	22.6	18.0	13.6	10.2	
145		32.0	28.6	22.6		17.8	13.6	10.0	
150		31.0	28.2	22.4		17.6	13.4	9.8	
155		30.0	27.8	22.2		17.6	13.2	9.6	
160		29.2	27.4	22.0		17.4	13.0	9.4	
165			27.0	21.8		17.2	12.8	9.4	
170			26.2	21.8		17.0	12.6	9.2	
175			25.4	21.6		16.8	12.6	9.0	
180			24.8	21.4		16.6	12.4	8.8	
185				21.2		16.4	12.2	8.6	
190				21.0		16.2	12.0	8.4	
195				20.6		16.0	11.8	8.4	
200				20.4		16.0	11.6	8.2	
205						15.8	11.4	8.0	
210						15.6	11.4	7.8	
215						15.4	11.2	7.6	
220						15.2	11.0	7.4	
225							10.8	7.2	
230							10.6	7.0	
235							10.4	7.0	
240							10.2	6.8	
245								6.6	
250								6.4	
255									6.2



81°

179.2 ft.



82-240 ft.



100%
29' 2" Spread



360°



264,500 lbs.



GMK

7550

Pounds (thousands)

Feet	82	101.7	121.4	141.1	160.8	180.5	200.1	219.8	239.5
70									
75	55.0								
80	55.0	45.0							
85	55.0	45.0							
90	53.0	45.0	36.6	29.8					
95	51.0	45.0	36.6	29.8	23.8				
100	49.0	45.0	36.6	29.8	23.8	19.6	15.2		
105	47.0	43.2	36.6	29.8	23.8	19.6	15.2	11.6	
110	45.0	41.8	36.6	29.8	23.8	19.4	15.2	11.6	
115		40.4	36.6	29.8	23.8	19.4	15.2	11.6	8.4
120		39.0	36.2	29.8	23.8	19.4	15.0	11.6	8.4
125		37.8	35.2	29.8	23.8	19.2	15.0	11.6	8.4
130		36.4	34.0	29.8	23.8	19.2	15.0	11.4	8.2
135		33.0	29.8	23.8	19.0	14.8	11.4	8.2	
140		32.0	29.2	23.8	19.0	14.8	11.2	8.0	
145		31.0	28.4	23.8	18.8	14.6	11.2	8.0	
150		30.0	27.4	23.8	18.8	14.6	11.0	7.8	
155		26.6	23.6	18.6	14.4	11.0			
160		25.8	23.4	18.6	14.4	10.8			
165		25.2	23.2	18.4	14.2	10.8			
170		24.4	23.0	18.4	14.2	10.6			
175		22.4	18.2	14.0	10.4	7.4			
180		21.8	18.2	13.8	10.4	7.2			
185		21.2	18.0	13.8	10.2	7.2			
190		20.4	18.0	13.6	10.2	7.0			
195			17.6	13.6	10.0	6.8			
200				17.2	13.4	10.0	6.8		
205				16.8	13.4	9.8	6.6		
210					13.2	9.6	6.6		
215					13.0	9.6	6.4		
220					13.0	9.4	6.2		
225						9.2	6.2		
230						9.2	6.0		
235						9.0	5.8		
240							8.8	5.8	
245								5.6	
250								5.6	
255								5.4	
260								5.2	


GROVE

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE. The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.

working range

Length and Type of Boom

21

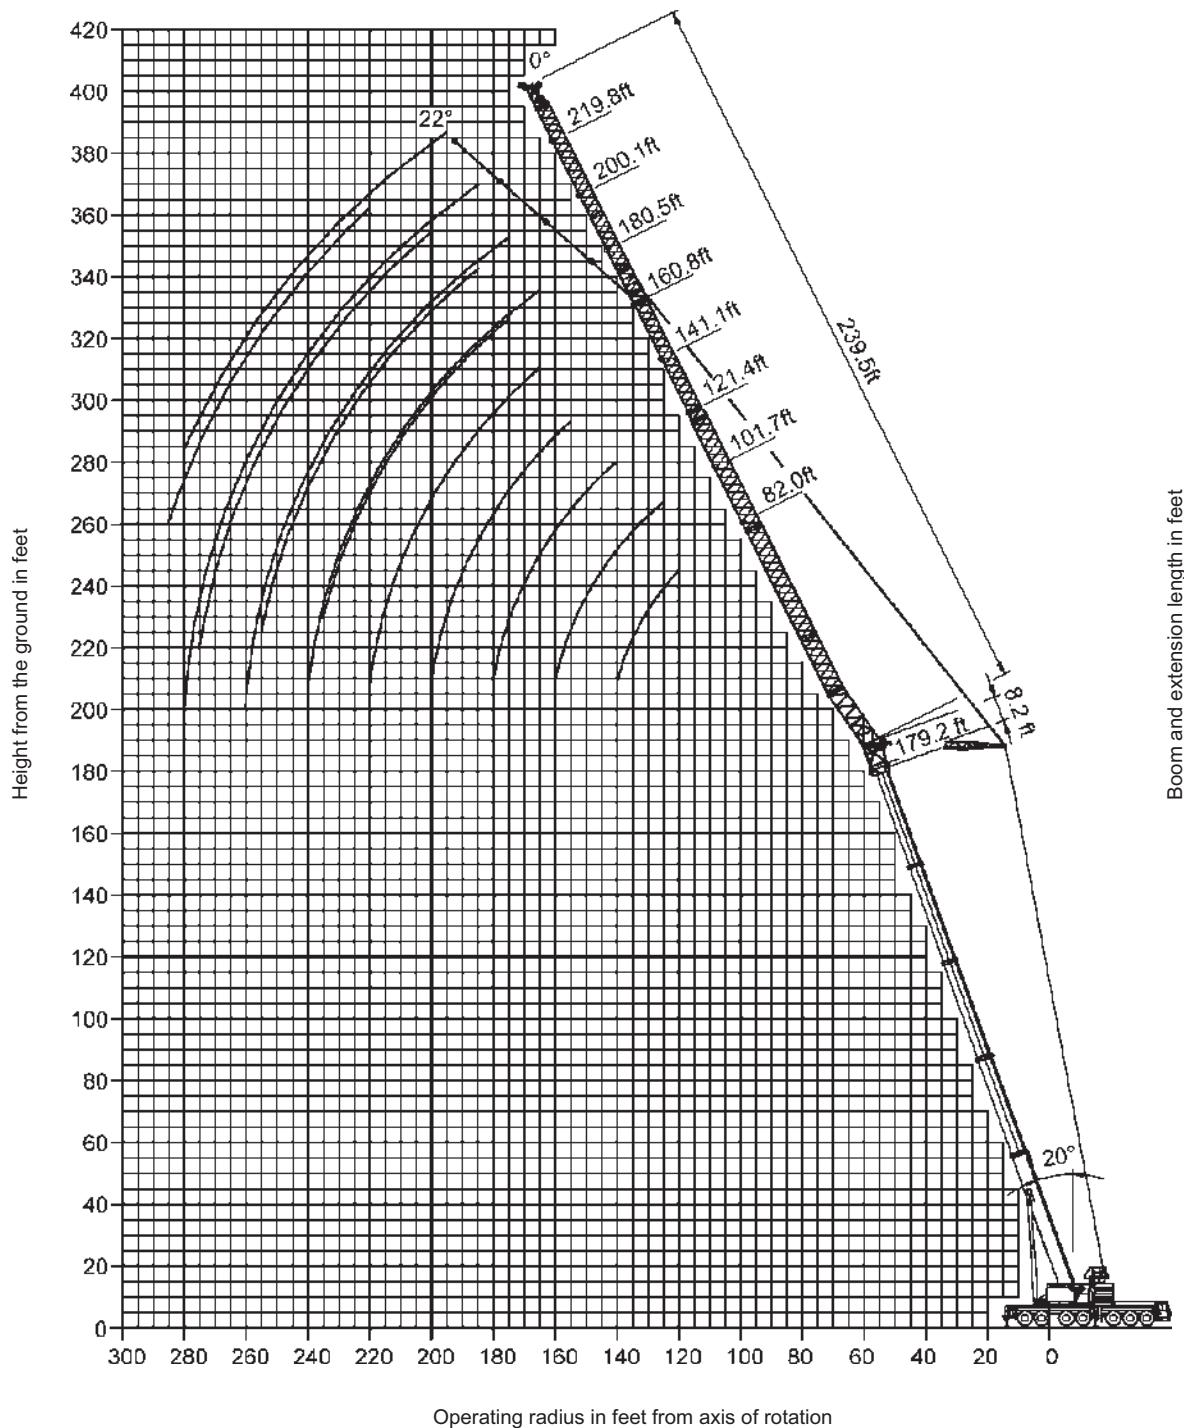

Boom and extension length in feet

GMK 7550

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE. The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.

GROVE

load charts

22



70°
52.6 ft.



82-240 ft.



100%
2" Spread



360°



264,500 lbs.

Feet	82	101.7	121.4	141.1	160.8	180.5	200.1	219.8	239.5
60	152.0								
65	142.0								
70	134.0								
75	128.0	125.0							
80	120.0	119.0							
85	112.0	112.0							
90	104.0	105.0	100.0						
95	98.0	97.0	81.0						
100	92.0	91.0	80.0	64.0					
105	86.0	85.0	79.0	62.0					
110	78.0	80.0	77.0	61.0					
115		76.0	75.0	59.0	46.0				
120		72.0	71.0	58.0	45.0	34.4			
125		68.0	67.0	57.0	43.6	33.4	25.4		
130		61.0	64.0	56.0	42.6	32.6	24.4		
135			61.0	54.0	41.6	31.8	23.4	17.6	
140			58.0	53.0	40.6	31.0	22.6	17.2	
145			55.0	51.0	39.6	30.2	22.0	16.6	
150			49.0	50.0	38.8	29.4	21.4	16.0	
155				48.0	38.0	28.8	20.8	15.6	
160				45.0	37.0	28.0	20.2	15.0	
165				43.2	36.2	27.2	19.8	14.6	
170				40.0	35.4	26.4	19.2	14.2	
175					34.6	25.6	18.8	13.6	
180					34.0	24.8	18.2	13.2	
185					33.0	24.0	17.8	12.8	
190					31.4	23.2	17.2	12.4	
195						22.6	16.8	12.0	
200						22.2	16.4	11.6	
205						21.6	16.0	11.2	
210							15.6	10.8	
215							15.0	10.6	
220							14.6	10.2	
225							14.4	9.8	
230								9.6	
235								9.2	
240								9.0	
245								8.6	

Feet	82	101.7	121.4	141.1	160.8	180.5	200.1	219.8	239.5
70									
75	116.0								
80	110.0								
85	104.0								
90	97.0	96.0							
95	90.0	89.0	89.0						
100	85.0	84.0	83.0						
105		78.0	78.0	75.0					
110		74.0	73.0	72.0					
115		70.0	69.0	68.0	57.0				
120		66.0	65.0	64.0	56.0				
125		62.0	61.0	55.0	42.4				
130		59.0	58.0	54.0	41.6				
135		56.0	55.0	53.0	40.8	31.4			
140		53.0	52.0	52.0	39.8	30.8	22.8		
145			50.0	49.0	39.0	30.0	22.2	16.8	
150			48.0	47.0	38.2	29.4	21.6	16.2	
155			46.0	45.0	37.6	28.6	21.0	15.8	
160			43.6	43.2	36.8	28.0	20.4	15.4	
165			41.4	36.0	27.2	20.0	14.8		
170			39.6	35.2	26.4	19.4	14.4		
175			38.0	34.6	25.6	19.0	14.0		
180			36.4	33.8	24.8	18.6	13.6		
185				33.2	24.0	18.0	13.2		
190				32.6	23.6	17.6	12.8		
195				31.8	23.0	17.2	12.4		
200				30.4	22.4	16.6	12.0		
205					22.0	16.2	11.6		
210					21.6	15.8	11.2		
215					21.0	15.4	11.0		
220						20.6	15.0	10.6	
225							14.6	10.2	
230							14.4	10.0	
235							14.0	9.6	
240								9.4	
245								9.0	
250								8.8	
255								8.4	

GMK 7550

GROVE

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE. The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.

load charts

70°
 82-240 ft.
 100% 29' 2" Spread
 360°
 264,500 lbs.

Feet	82	101.7	121.4	141.1	160.8	180.5	200.1	219.8	239.5
85									
90	72.0								
95	69.0								
100	66.0	63.0							
105	64.0	61.0	58.0						
110	61.0	58.0	55.0						
115	59.0	56.0	53.0						
120	54.0	52.0	49.0						
125	52.0	50.0	48.0						
130	51.0	48.0	46.0						
135	50.0	47.0	44.0	43.0					
140	46.0	43.0	41.6	36.8					
145	44.0	41.6	40.4	36.8	27.8				
150	42.8	40.4	39.0	35.8	27.4				
155	41.6	39.2	37.8	34.8	26.8	20.2			
160		38.0	36.8	34.0	26.2	19.6	14.8		
165		37.0	35.6	33.0	25.6	19.2	14.4		
170		36.0	34.6	32.0	25.0	18.8	14.0		
175		35.0	33.6	31.2	24.2	18.4	13.8		
180			32.8	30.2	23.6	18.0	13.4		
185			31.6	29.4	23.2	17.6	13.0		
190			30.4	28.6	22.8	17.2	12.6		
195			29.2	27.8	22.4	16.8	12.2		
200				27.0	22.0	16.4	12.0		
205					26.0	21.6	16.0	11.6	
210					25.0	21.0	15.8	11.2	
215					24.0	20.6	15.4	11.0	
220						20.2	15.0	10.6	
225						19.8	14.6	10.4	
230						19.6	14.2	10.0	
235						19.2	14.0	9.8	
240							13.6	9.4	
245							13.4	9.2	
250								8.8	
255								8.6	
260								8.4	
265								8.0	

23

Feet	82	101.7	121.4	141.1	160.8	180.5	200.1	219.8	239.5
95									
100	51.0								
105	51.0								
110	49.0								
115	46.0	42.0							
120	44.0	40.4							
125	42.0	39.0	36.8						
130	40.2	37.6	35.6						
135		36.4	34.4	32.0					
140		35.2	33.2	30.8					
145		34.0	32.0	29.8	28.8				
150		33.0	31.0	28.8	27.8				
155			30.0	27.8	26.8	24.6			
160			29.0	27.0	25.8	24.2	21.4		
165			28.2	26.0	25.0	23.4	21.2	16.4	
170			27.4	25.4	24.4	22.6	20.8	16.2	
175			24.8	23.8	21.8	20.2	16.0	11.8	
180			24.0	23.0	21.0	19.6	15.8	11.8	
185			23.4	22.4	20.4	19.0	15.6	11.4	
190			22.8	21.6	19.6	18.4	15.2	11.2	
195			21.0	19.0	17.8	17.8	15.0	11.0	
200			20.4	18.4	17.2	17.2	14.8	10.8	
205			19.8	17.8	16.6	16.6	14.6	10.6	
210					17.2	16.0	14.2	10.2	
215					16.8	15.6	14.0	10.0	
220					16.2	15.0	13.6	9.8	
225					15.8	14.6	13.4	9.6	
230						14.0	13.0	9.4	
235						13.6	12.6	9.0	
240						13.2	12.2	8.8	
245						12.8	11.8	8.6	
250							11.4	8.4	
255							11.2	8.2	
260							10.8	8.0	
265								7.8	
270								7.6	
275								7.2	
280								7.0	


GMK 7550

load charts

24



Feet	82	101.7	121.4	141.1	160.8	180.5	200.1	219.8	239.5
110									
115	39.0								
120	37.6	35.2							
125	36.2	33.8							
130	35.0	32.6							
135	33.8	31.6	29.6						
140		30.4	28.6						
145		29.4	27.6	25.4					
150		28.4	26.6	24.6					
155		27.6	25.8	24.0	23.0				
160			25.0	23.2	22.2	19.4			
165			24.4	22.4	21.4	19.4	17.2		
170			23.6	21.6	20.6	18.6	17.2		
175			23.0	21.0	20.0	18.0	16.8	13.6	
180				20.2	19.2	17.4	16.2	13.4	
185				19.6	18.6	16.6	15.6	13.2	9.6
190				19.0	18.0	16.0	15.0	13.2	9.6
195				18.4	17.4	15.6	14.6	12.8	9.4
200					16.8	15.0	14.0	12.4	9.2
205					16.2	14.4	13.4	12.0	9.0
210					15.8	14.0	13.0	11.6	9.0
215					15.2	13.4	12.6	11.2	8.8
220						13.0	12.2	10.8	8.6
225						12.6	11.6	10.4	8.4
230						12.0	11.2	10.0	8.2
235						11.6	10.8	9.6	8.0
240							10.4	9.4	7.8
245							10.0	9.0	7.6
250							9.8	8.6	7.2
255							9.4	8.2	7.0
260								8.0	6.8
265								7.6	6.6
270								7.4	6.2
275								7.0	6.0
280									5.8
285									5.4



Feet	82	101.7	121.4	141.1	160.8	180.5	200.1	219.8	239.5
115									
120	35.0								
125	33.6	29.8							
130	32.4	28.8							
135	31.2	27.6							
140	30.2	26.8	25.0						
145		25.8	24.4						
150		25.2	23.4						
155		24.4	22.6	20.6					
160		23.6	21.8	19.8					
165			21.2	19.2	18.2	15.4			
170			20.4	18.4	17.4	15.4			
175			19.8	17.8	16.8	14.8	12.8		
180			19.2	17.2	16.2	14.2	12.8		
185				16.6	15.6	13.8	12.4	10.6	
190				16.0	15.0	13.2	12.0	10.6	
195				15.6	14.6	12.6	11.4	10.2	7.6
200				15.0	14.0	12.2	11.0	9.8	7.6
205					13.6	11.6	10.6	9.4	7.4
210					13.0	11.2	10.0	9.0	7.4
215					12.6	10.8	9.6	8.6	7.2
220					12.2	10.4	9.2	8.4	7.0
225						10.0	9.0	8.0	6.6
230						9.6	8.6	7.6	6.4
235						9.2	8.2	7.2	6.0
240						8.8	7.8	7.0	5.8
245							7.4	6.6	5.4
250							7.2	6.2	5.2
255							6.8	6.0	4.8
260							6.6	5.6	4.6
265								5.4	4.4
270								5.2	4.0
275								4.8	3.8
280								4.6	3.6

GMK 7550


GROVE

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE. The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.

working range

Length and Type of Boom

25

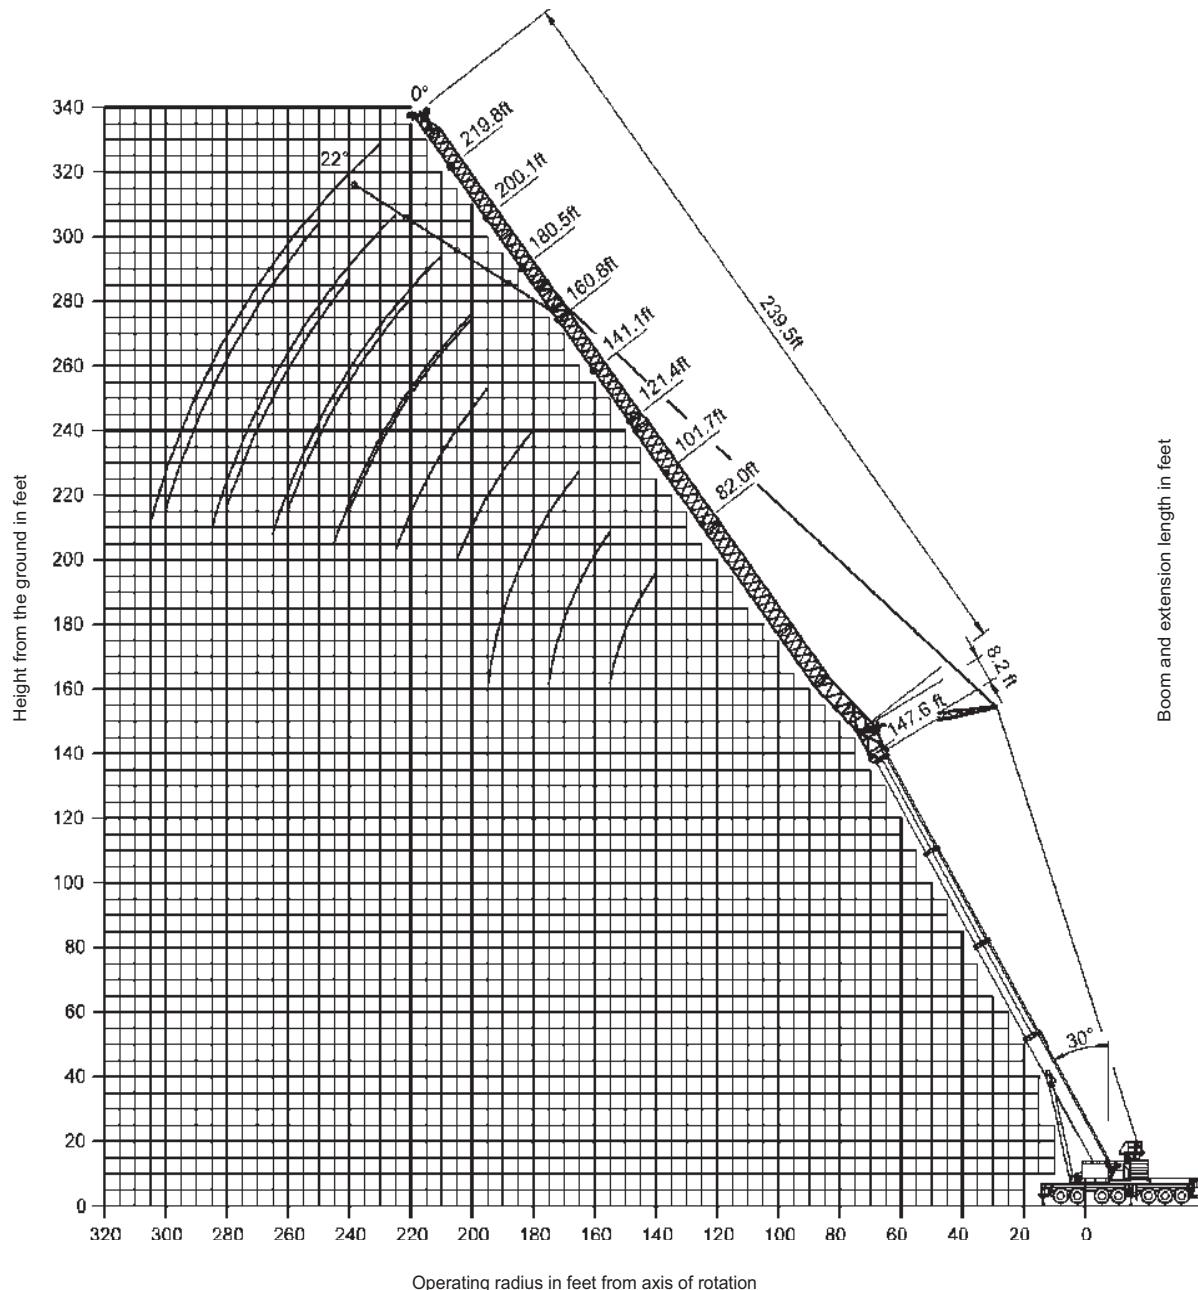

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE. The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.

GROVE

GMK 7550

load charts

26



60°
52.6 ft.



82-240 ft.



100%
29' 2" Spread



360°
264,500 lbs.



Pounds (thousands)

Feet	82	101.7	121.4	141.1	160.8	180.5	200.1	219.8	239.5
90	100.0								
95	94.0	93.0							
100	88.0	87.0							
105		82.0	81.0						
110		77.0	76.0						
115		73.0	72.0						
120		69.0	68.0	67.0					
125			64.0	63.0					
130			61.0	60.0					
135			58.0	57.0	57.0				
140			56.0	55.0	54.0				
145				52.0	52.0	41.6			
150				50.0	49.0	40.6			
155				48.0	47.0	39.6	30.2		
160				46.0	45.0	38.8	29.4		
165					43.2	37.8	28.6	20.8	
170					41.4	37.0	28.0	20.2	
175					39.8	36.2	27.2	19.6	
180						35.4	26.4	19.2	14.0
185						34.6	25.4	18.6	13.6
190						33.8	24.4	18.2	13.2
195						33.2	23.8	17.6	12.8
200							23.2	17.2	12.4
205							22.6	16.8	12.0
210							22.0	16.4	11.6
215							21.6	15.8	11.2
220								15.4	10.8
225								15.0	10.6
230								14.8	10.2
235								14.4	9.8
240									9.6
245									9.2
250									9.0
255									8.6

GMK 7550

GROVE

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE. The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.

load charts

27

	60°		82-240 ft.		100%		29' 2" Spread		360°		264,500 lbs.
											Pounds (thousands)
Feet	82	101.7	121.4	141.1	160.8	180.5	200.1	219.8	239.5		
95											
100	77.0										
105	72.0										
110	68.0										
115	64.0	63.0									
120		60.0									
125		57.0	56.0								
130		54.0	53.0								
135		51.0	50.0								
140		48.0	47.0								
145		46.0	44.0								
150		43.4	42.4								
155		41.6	40.4	39.6							
160		38.6	37.8	37.0							
165		37.0	36.2	35.4							
170		35.4	34.6	33.8							
175		34.0	33.2	32.4	28.0						
180		31.8	31.0	27.4							
185		30.6	29.8	26.8	19.4						
190		29.4	28.6	26.0	19.0						
195			28.2	27.4	25.4	18.4					
200			26.2	24.8	18.0	13.2					
205			25.2	23.8	17.6	12.8					
210			24.2	23.0	17.2	12.4					
215			23.4	22.4	16.6	12.0					
220				21.8	16.2	11.6					
225				21.0	15.8	11.2					
230				20.2	15.4	11.0					
235					19.4	15.0	10.6				
240						14.6	10.2				
245							14.4	10.0			
250							14.0	9.6			
255							13.6	9.2			
260								9.0			
265									8.8		
270									8.4		
275										8.2	

	60°		82-240 ft.		100%		29' 2" Spread		360°		264,500 lbs.
115.9 ft.											
											Pounds (thousands)
Feet	82	101.7	121.4	141.1	160.8	180.5	200.1	219.8	239.5		
115											
120	51.0										
125	49.0										
130	47.0										
135	46.0	43.6									
140		42.2									
145		40.6	38.6								
150		38.8	37.4								
155		36.8	36.2								
160		34.4	33.2								
165		33.0	31.8								
170		31.6	30.4								
175		30.2	29.0	28.2							
180			27.8	27.0							
185			26.6	25.8	25.0						
190			25.6	24.8	23.8						
195			24.4	23.8	22.8	22.0					
200			22.8	21.8	21.2						
205			21.8	21.0	20.2	19.4	17.6				
210			21.0	20.2	19.4	17.2	12.6				
215			20.0	19.2	18.6	16.8	12.2				
220				18.4	17.8	16.4	12.0				
225				17.8	17.0	16.0	11.6				
230				17.0	16.4	15.8	11.2				
235				16.2	15.6	15.2	11.0				
240					15.0	14.6	10.6				
245						14.4	13.8	10.4			
250							13.2	10.0			
255								12.8	9.8		
260								12.2	9.4		
265									9.2		
270										8.8	
275										8.6	
280										8.4	
285										8.0	

GMK7550

load charts

28



147.6 ft.



82-240 ft.



100%
2" Spread



360°



264,500 lbs.

Pounds (thousands)

Feet	82	101.7	121.4	141.1	160.8	180.5	200.1	219.8	239.5
135									
140	33.4								
145	31.6								
150	30.0								
155	28.6	26.0							
160		25.2							
165		24.6	23.0						
170		23.8	22.2						
175		23.0	21.4						
180			20.8	18.8					
185			20.2	18.2					
190			19.6	17.6					
195			18.8	17.0	16.0				
200				16.4	15.4	13.6			
205				16.0	15.0	13.2			
210					14.4	12.6	15.2		
215					14.0	12.2	12.6		
220					13.4	11.6	10.6		
225					13.0	11.2	10.2	9.2	
230						10.8	9.8	8.8	8.4
235						10.4	9.4	8.4	8.4
240						10.0	9.0	8.2	8.2
245						9.6	8.6	7.8	7.8
250							8.2	7.4	7.6
255							7.8	7.0	7.2
260							7.6	6.8	7.0
265							7.2	6.4	6.6
270								6.2	6.4
275								5.8	6.0
280								5.6	5.6
285								5.4	5.2
290									4.8
295									4.4
300									4.0
305									3.6



163.4 ft.



82-200 ft.



100%
2" Spread



360°



264,500 lbs.

Pounds (thousands)


Feet	82	101.7	121.4	141.1	160.8	180.5	200.1
140							
145	25.4						
150	24.8						
155	24.0						
160	23.2	21.2					
165		20.6					
170		19.8					
175		19.2	17.6				
180		18.6	17.0				
185			16.4	14.4			
190			15.8	14.0			
195			15.4	13.4			
200			14.8	13.0			
205				12.4	11.4		
210				12.0	11.0	9.2	
215				11.6	10.6	8.8	
220				11.2	10.2	8.4	7.6
225					9.8	8.0	7.2
230					9.4	7.6	6.8
235					9.0	7.2	6.4
240					8.6	6.8	6.0
245						6.6	5.8
250						6.2	5.4
255						6.0	5.2
260						5.6	4.8
265							4.6
270							4.2
275							4.0
280							3.8

GMK 7550

GROVE

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE. The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.

load charts

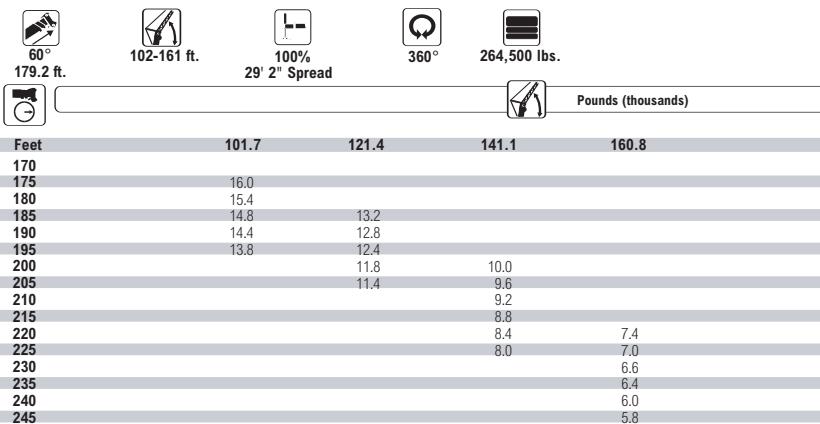

29

GMK 7550

Working Range w/MegaWingLift


240 ft. Luffing Jib

30

Height from the ground in feet

Boom and jib length in feet

GMK 7550 w/MWL

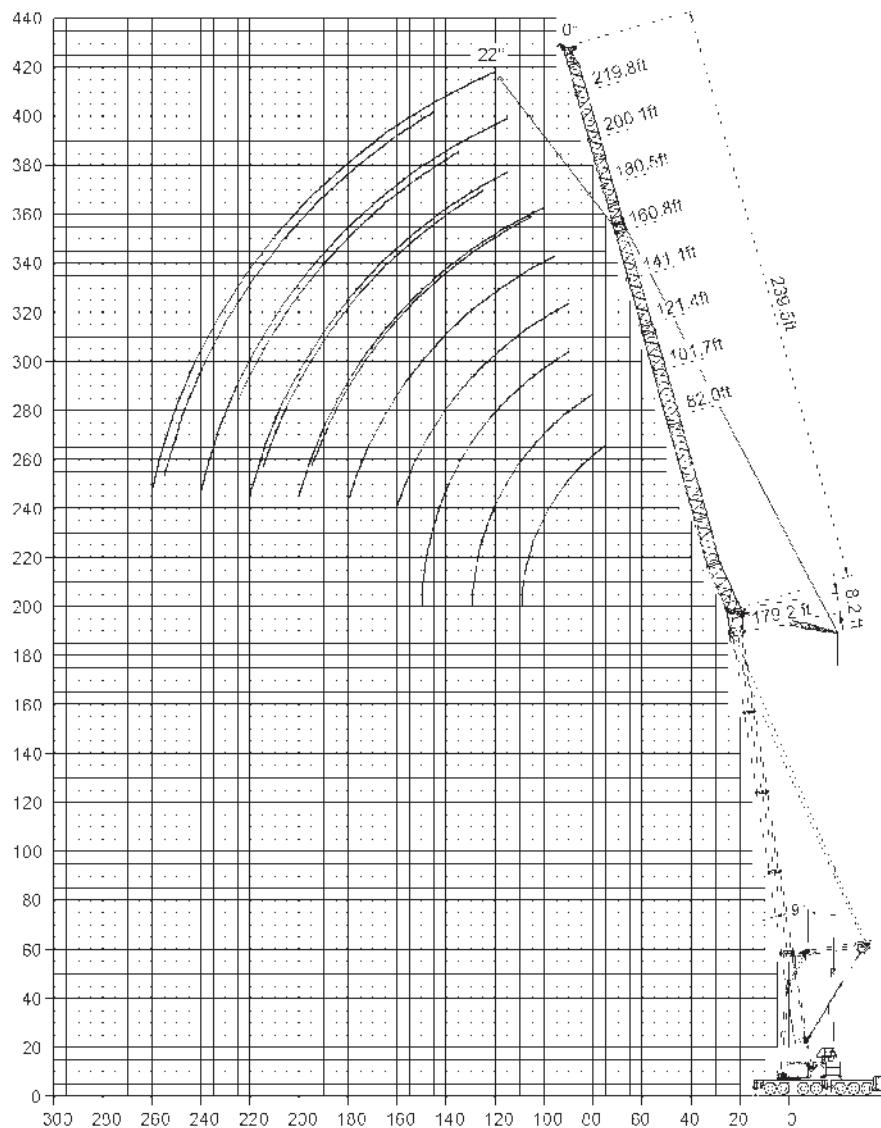

Operating radius in feet from axis of rotation


Working Range w/MegaWingLift

240 ft. Luffing Jib

33

Height from the ground in feet

Boom and jib length in feet

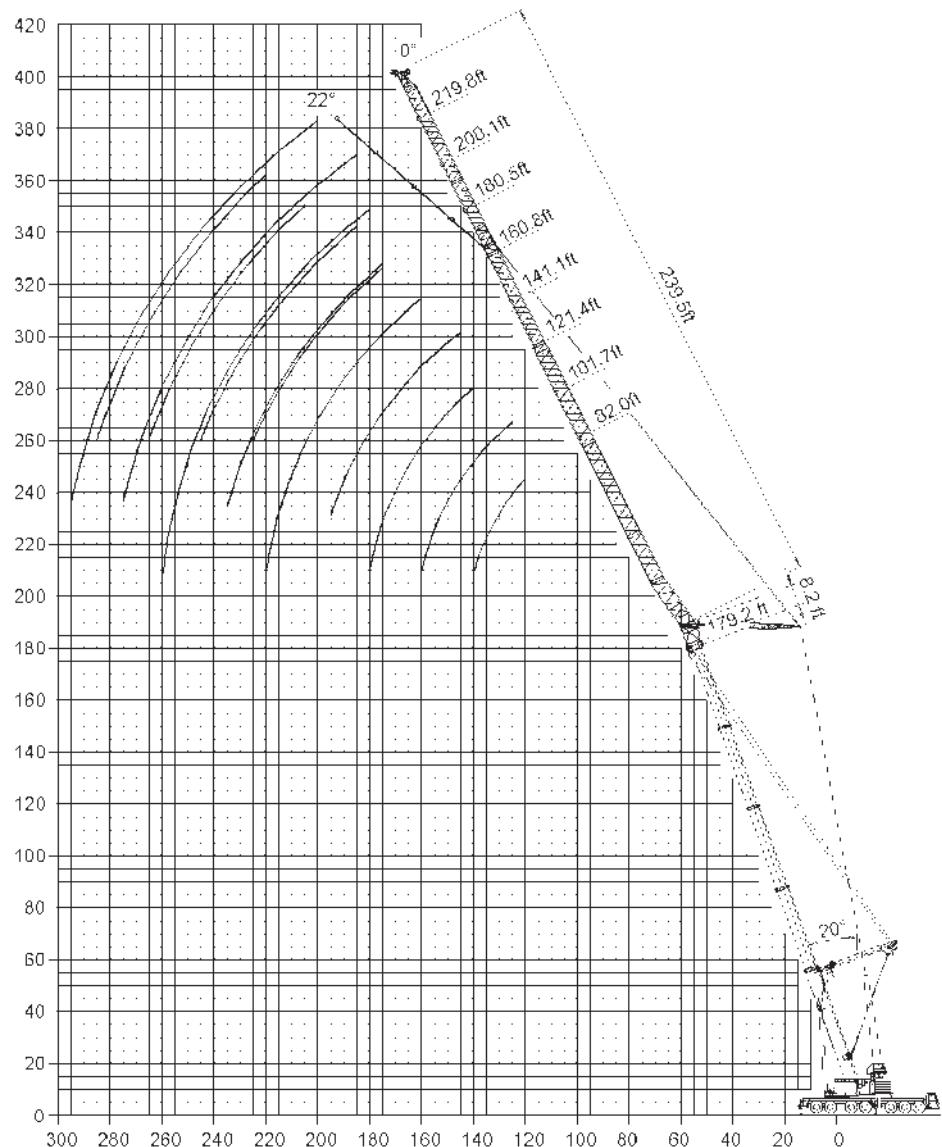

Operating radius in feet from axis of rotation

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE. The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.

GROVE

GMK 7550 w/MWML

load charts w/MegaWingLift



34

Feet	82'	101.7'	121.4'	141.1'	160.8'	180.5'	200.1'	219.8'	239.5'
95	98.0								
100	93.0	91.0							
105	88.0	87.0							
110	84.0	83.0							
115	80.0	79.0	78.0						
120	75.0	74.0	71.0						
125	72.0	71.0	70.0	60.0					
130	68.0	68.0	67.0	60.0					
135	66.0	65.0	64.0	59.0					
140		62.0	61.0	59.0	48.0				
145		60.0	59.0	58.0	47.0	40.4			
150		58.0	57.0	56.0	47.0	40.4			
155		55.0	54.0	54.0	47.0	40.4			
160			52.0	52.0	47.0	40.4	33.4		
165			50.0	50.0	46.0	40.4	33.2	25.2	
170			49.0	48.0	46.0	40.4	32.8	24.8	
175				46.0	45.0	40.4	32.4	24.4	
180				45.0	43.6	40.4	32.0	23.8	
185				43.2	42.2	40.4	31.6	23.4	
190				41.6	40.8	39.8	31.2	23.0	
195					39.2	38.4	30.8	22.4	
200					37.8	37.0	29.8	22.0	
205					36.6	35.8	29.0	21.4	
210						34.6	28.0	21.0	
215						33.4	27.2	20.6	
220						32.2	26.6	20.2	
225						31.2	26.0	19.8	
230							25.6	19.2	
235							25.2	18.8	
240							24.8	18.4	
245							24.4	18.0	
250								17.8	
255								17.4	
260								17.2	
265									16.8



Feet	82'	101.7'	121.4'	141.7'	160.8'	180.5'	200.1'	219.8'	239.5'
105	83.0								
110	79.0								
115	75.0	71.0							
120	72.0	69.0							
125	68.0	68.0	62.0						
130	65.0	65.0	61.0						
135		62.0	59.0	54.0					
140		59.0	58.0	53.0	51.0				
145		57.0	56.0	53.0	50.0				
150		55.0	54.0	53.0	49.0				
155			52.0	51.0	48.0	39.6			
160			50.0	49.0	47.0	39.6	37.0		
165			48.0	47.0	46.0	39.6	37.0		
170			46.0	45.0	44.0	39.6	37.0		
175				43.8	42.8	39.6	37.0	31.2	
180				42.2	41.2	39.6	36.6	31.2	24.0
185					39.8	38.4	36.2	31.0	23.6
190					38.4	37.0	35.6	30.8	23.4
195					37.0	35.6	34.8	30.6	23.0
200					35.6	34.4	33.4	30.4	22.6
205					34.4	33.0	32.2	30.0	22.2
210					32.0	31.2	29.8	21.8	
215					30.8	30.0	29.0	21.4	
220					29.8	29.0	28.2	21.0	
225						28.0	27.4		20.6
230						27.0	26.4		20.2
235						26.0	25.4		19.8
240						25.2	24.6		19.4
245						24.2	23.8		19.0
250							23.0		18.6
255							22.2		18.2
260							21.4		18.0
265								17.6	
270								17.4	
275								17.0	
280									16.8

GMK 7550 W/MWL

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE. The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.

GROVE

load charts w/MegaWingLift



70°

163 ft.



82-240 ft.

100%
29'-2" spread

360°



352,700 lbs.

35

Feet	82'	101.7'	121.4'	141.1'	160.8'	180.5'	200.1'	219.8'	239.5'
115	72.0								
120	70.0	62.0							
125	67.0	60.0							
130	64.0	59.0							
135	61.0	58.0	52.0						
140		56.0	51.0	46.0					
145		55.0	50.0	46.0					
150		52.0	49.0	45.0					
155		50.0	48.0	44.0	42.2				
160			47.0	43.2	41.6	35.2			
165				45.0	42.2	40.8	35.2		
170					43.6	41.2	35.2		
175					42.0	39.8	35.2	32.0	
180						38.4	39.0	35.0	31.6
185						37.2	38.0	34.6	31.2
190						35.8	36.6	34.0	30.6
195							35.4	33.6	30.4
200								35.0	31.6
205								35.2	31.2
210								28.4	22.4
215									22.2
220									22.0
225									21.6
230									21.4
235									21.0
240									20.8
245									20.4
250									20.0
255									19.6
260									19.2
265									19.0
270									18.6
275									18.2
280									18.0
285									17.6
									17.4
									17.0
									16.4

Feet	82'	101.7'	121.4'	141.1'	160.8'	180.5'	200.1'	219.8'	239.5'
120	57.0								
125	53.0	49.0							
130	51.0	47.0							
135	49.0	46.0							
140	47.0	43.8	41.4						
145		42.2	39.8	37.2					
150		40.6	38.4	36.0					
155		39.0	37.0	34.6					
160		37.4	35.6	33.4	34.6				
165			34.4	32.2	33.6				
170			33.0	31.0	32.6				
175			31.8	29.6	31.4	28.0			
180			30.6	28.0	29.6	26.6	25.2		
185				26.2	27.8	25.8	24.4	23.0	
190				25.0	26.6	25.0	23.8	22.4	
195				24.0	25.8	24.2	23.0	21.8	
200					25.0	23.4	22.4	21.2	19.6
205					24.2	22.8	21.6	20.6	19.2
210					23.4	22.0	21.0	20.0	18.6
215					22.6	21.4	20.4	19.4	18.2
220					21.8	20.6	19.8	18.8	17.6
225						20.0	19.2	18.2	17.2
230						19.2	18.6	17.6	16.6
235						18.6	18.0	17.2	16.2
240							17.4	16.6	15.6
245							16.8	16.2	15.2
250							16.2	15.6	14.6
255							15.6	15.2	14.2
260							15.0	14.6	13.8
265								14.2	13.2
270								13.6	12.8
275								13.2	12.4
280									12.0
285									11.6
290									11.2
295									10.8

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE. The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.

GROVE

GMK7550 w/MWL


Working Range w/MegaWingLift

240 ft. Luffing Jib

36

Height from the ground in feet

Boom and jib length in feet

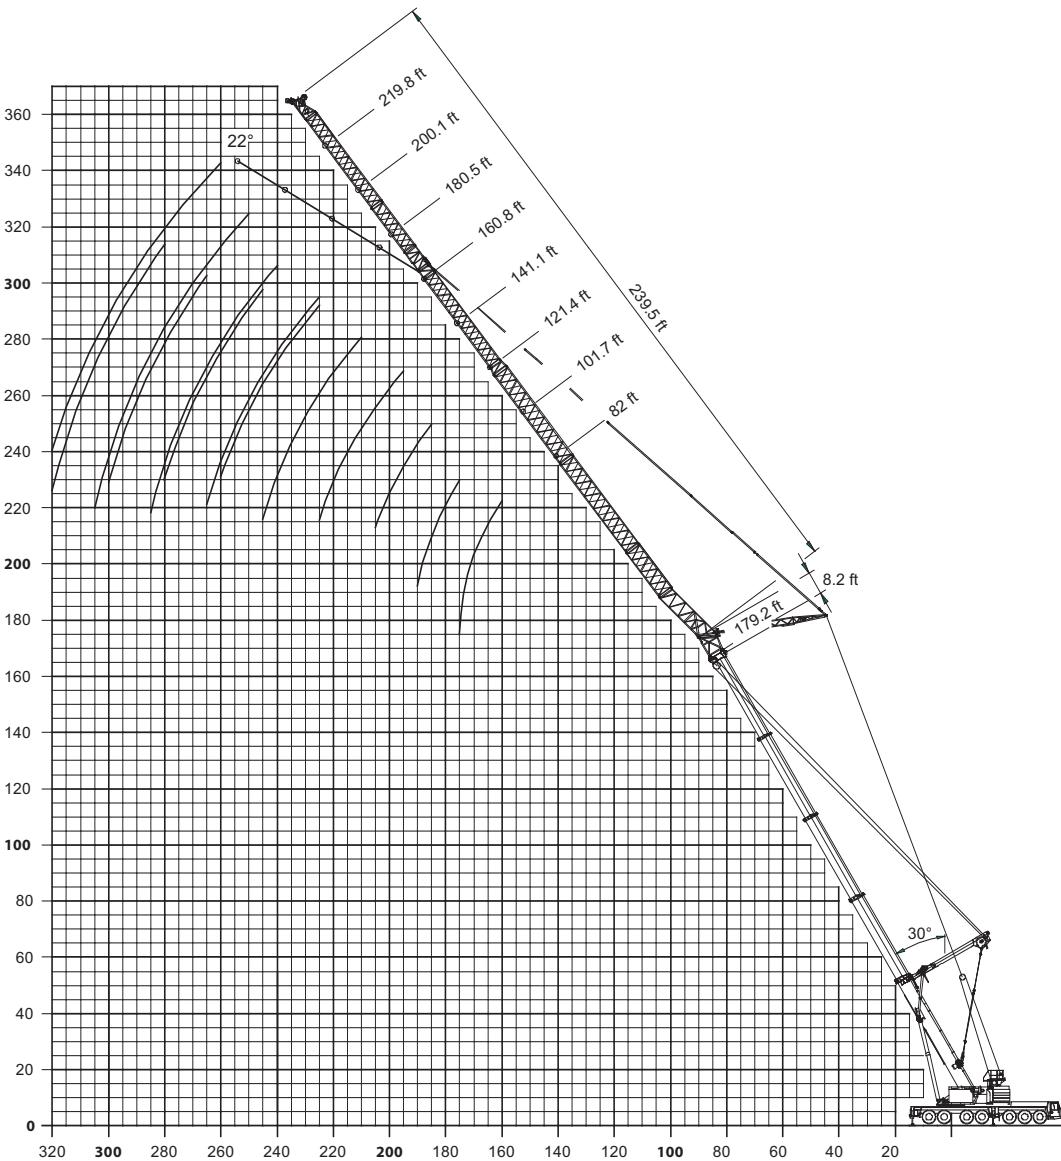

Operating radius in feet from axis of rotation

GMK 7550 w/MWL

GROVE

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE. The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.

load charts w/MegaWingLift

60°
116 ft.

82-240 ft.

100%
29'-2" spread

360°



352,700 lbs.



	Pounds (thousands)							
--	--------------------	--	--	--	--	--	--	--

37

Feet	82'	101.7'	121.4'	141.1'	160.8'	180.5'	200.1'	219.8'	239.5'
120	68.0								
125	65.0								
130	62.0								
135	60.0	58.0							
140		56.0							
145		54.0	53.0						
150		52.0	51.0						
155		50.0	49.0						
160		47.0	45.0						
165		45.0	43.6						
170		43.4	42.0						
175		41.6	40.4	39.4					
180			38.8	37.8					
185			37.4	36.4	35.0				
190			36.0	35.0	33.6				
195				33.8	32.4				
200				32.6	31.2	30.2			
205				31.4	30.0	29.0			
210					29.0	28.0	27.2		
215					27.8	27.0	26.2		
220					26.8	26.0	25.4		
225					26.0	25.0	24.4	21.4	
230						24.2	23.6	20.8	
235						23.4	22.6	20.4	
240						22.4	21.8	20.0	
245						21.6	21.0	19.6	
250							20.4	19.2	
255							19.6	18.8	
260							19.0	18.4	
265							18.2	17.8	
270								17.2	
275								16.6	
280								16.0	
285									15.4

60°
148 ft.

82-240 ft.

100%
29'-2" spread

360°



352,700 lbs.

	Pounds (thousands)							
--	--------------------	--	--	--	--	--	--	--

Feet	82'	101.7'	121.4'	141.1'	160.8'	180.5'	200.1'	219.8'	239.5'
140	52.0								
145	50.0								
150	48.0								
155	46.0	44.0							
160		42.6							
165		40.8	39.6						
170		39.2	38.2						
175		37.6	36.6	35.0					
180		35.2	33.6						
185		34.0	32.4						
190		32.6	31.2						
195		31.4	30.0	29.0					
200			28.8	27.8					
205			27.8	26.8	25.6				
210				25.8	24.8				
215				24.8	23.8				
220				24.0	22.8	22.0			
225				23.0	22.0	21.0			
230					21.2	20.2	19.6		
235					20.4	19.6	18.8		
240					19.6	18.8	18.2	17.2	
245					18.8	18.0	17.4	16.6	
250						17.4	16.8	15.8	
255						16.6	16.2	15.2	
260						16.0	15.4	14.6	
265						15.4	14.8	14.0	
270							14.2	13.4	
275							13.8	12.8	
280							13.2	12.4	
285							12.6	11.8	
290								11.4	
295								10.8	
300								10.4	

GMK7550 w/MWL

load charts w/MegaWingLift



38

Feet	Pounds (thousands)								
	82'	101.7'	121.4'	141.1'	160.8'	180.5'	200.1'	219.8'	239.5'
145	47.0								
150	45.0								
155	43.6								
160	41.8	40.4							
165		38.8							
170		37.2							
175		35.6	34.6						
180		34.2	33.2						
185			32.0	30.2					
190			30.8	29.2					
195			29.6	28.0					
200			28.4	27.0	26.4				
205				26.0	25.4				
210				25.0	24.4	22.8			
215				24.0	23.6	22.0			
220				23.0	22.6	21.2			
225					21.8	20.2	19.2		
230					21.0	19.6	18.6		
235					20.2	18.8	17.8		
240					19.4	18.0	17.0	16.2	
245						17.4	16.4	15.6	
250						16.6	15.8	15.0	13.8
255						16.0	15.2	14.4	13.2
260							14.6	13.8	12.6
265							14.0	13.2	12.2
270							13.4	12.6	11.6
275							12.8	12.2	11.0
280							12.2	11.6	10.6
285								11.0	10.2
290								10.6	9.6
295								10.2	9.2
300									8.8
305									8.2
310									7.8


Feet	Pounds (thousands)								
	82'	101.7'	121.4'	141.1'	160.8'	180.5'	200.1'	219.8'	239.5'
160	39.6								
165	38.0								
170	36.4								
175	34.8	33.4							
180		32.2							
185		31.0	29.0						
190		29.8	27.8						
195			25.8	23.2					
200			24.6	22.4					
205			23.6	21.6					
210				21.0	22.6				
215				20.2	21.8				
220				19.4	20.8				
225				18.8	20.0	18.6			
230					19.4	17.8			
235					18.6	17.0			
240					17.8	16.4	15.4		
245					17.2	15.8	14.6		
250						15.0	14.0	13.2	
255						14.4	13.4	12.6	
260						13.8	12.8	12.0	10.8
265						13.2	12.4	11.6	10.2
270							11.8	11.0	9.8
275							11.2	10.6	9.2
280							10.8	10.0	8.8
285							10.2	9.6	8.4
290								9.2	8.0
295								8.6	7.6
300								8.2	7.0
305								7.8	6.6
310									6.2
315									6.0
320									5.6

GMK 7550 w/MMWL

working range

230 ft Lattice Extension

39

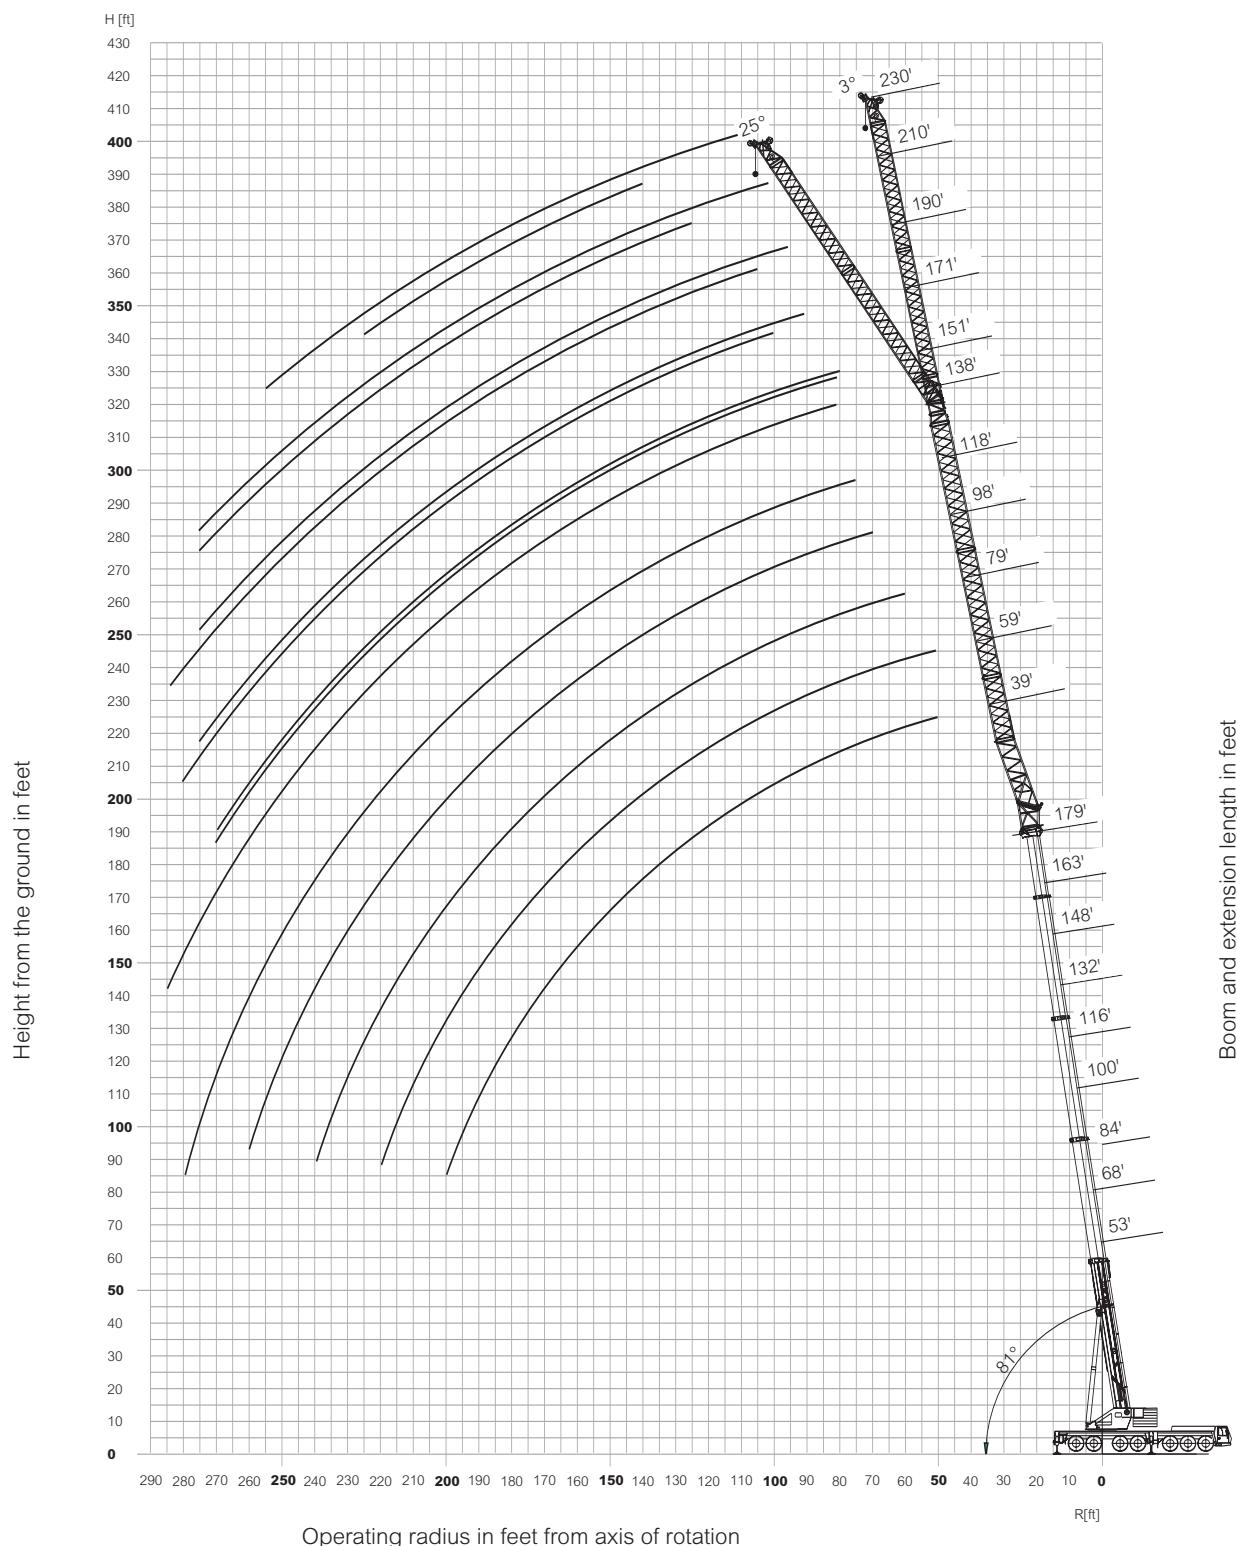

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE. The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.

GROVE

GMK 7550

load charts



163 ft



39 - 230 ft.



264,500 lbs.



100%



360°

29' 2" Spread

40

	Pounds (thousands)											
	163'						163'					
Fl	39	59	79	98	118	138	151	171	190	210	230	
	3°	3°	3°	3°	3°	3°	3°	25°	3°	25°	3°	25°
45	105.0											
50	100.0	87.0										
55	96.0	83.0	66.0									
60	90.0	80.0	63.0	51.0								
65	85.0	77.0	61.0	49.0								
70	79.0	72.0	58.0	47.0	41.6							
75	74.0	68.0	56.0	45.0	40.0	33.8	28.2					
80	70.0	64.0	53.0	43.6	38.6	32.6	27.0	25.6	23.4			
85	66.0	61.0	51.0	42.0	37.2	31.4	26.0	24.4	22.6			
90	62.0	57.0	50.0	40.4	35.8	29.8	24.8	23.6	21.6	19.0		
95	58.0	54.0	48.0	39.0	34.4	28.4	23.8	22.6	20.8	18.6	15.4	13.0
100	54.0	51.0	46.0	37.8	33.4	26.8	23.0	21.8	19.8	17.8	15.0	12.4
105	52.0	49.0	45.0	36.6	32.2	25.8	22.0	21.0	19.2	17.2	14.4	12.0
110	49.0	46.0	43.0	35.2	31.2	25.0	21.2	20.2	18.4	16.4	13.8	11.4
115	46.0	44.0	41.4	34.0	30.0	24.2	20.4	19.4	17.6	15.8	13.2	11.0
120	43.6	41.8	39.6	32.8	28.8	23.4	19.6	18.8	17.0	15.2	12.8	10.6
125	41.0	39.8	37.8	31.6	27.6	22.4	18.8	18.0	16.2	14.6	12.2	10.2
130	38.6	38.0	36.0	30.4	26.4	21.8	18.2	17.4	15.6	14.2	11.8	9.6
135	36.6	36.0	34.2	29.2	25.2	21.2	17.6	16.8	15.0	13.6	11.2	9.0
140	34.6	34.2	32.6	28.0	24.2	20.4	17.0	16.2	14.4	13.2	10.8	8.6
145	32.6	32.4	30.8	26.8	23.6	19.8	16.4	15.6	14.0	12.6	10.4	8.4
150	30.6	30.6	29.0	25.8	23.0	19.2	15.8	15.2	13.4	12.2	10.0	8.2
155	28.6	29.0	27.4	25.0	22.4	18.6	15.2	14.6	13.0	11.8	9.6	7.6
160	26.6	27.4	25.6	24.0	21.6	18.2	14.8	14.0	12.4	11.4	10.6	9.2
165	25.0	26.0	24.4	23.2	21.0	17.6	14.2	13.6	12.0	11.0	10.2	8.8
170	23.0	24.4	23.4	22.2	20.4	17.2	13.8	13.2	11.6	10.6	9.8	8.6
175	21.2	22.8	22.4	21.2	19.8	16.6	13.4	12.8	11.2	10.2	9.4	8.4
180	19.4	21.2	21.4	20.4	19.2	16.2	12.8	12.4	10.8	9.8	9.0	8.0
185	17.8	19.6	20.2	19.6	18.4	15.8	12.4	12.0	10.4	9.6	8.6	7.6
190	16.4	18.0	19.2	18.6	17.8	15.4	12.0	11.6	10.0	9.2	8.4	7.2
195		16.4	18.2	17.8	17.2	15.0	11.6	11.2	9.6	8.8	8.0	7.0
200		15.0	16.8	17.0	16.6	14.6	11.4	11.0	9.2	8.6	7.8	6.8
205		13.8	15.4	16.0	15.8	14.2	11.0	10.6	9.0	8.2	7.4	6.6
210		14.2	15.2	15.0	13.8	10.6	10.2	8.6	8.0	7.2	6.2	5.6
215		12.8	13.8	14.4	13.4	10.2	10.0	8.4	7.8	6.8	6.0	5.4
220		11.8	12.6	13.6	12.8	10.0	9.6	8.0	7.4	6.6	5.8	5.0
225		10.6	11.6	12.4	12.2	9.6	9.2	7.8	7.2	6.2	5.6	4.8
230			10.4	11.4	11.6	9.0	8.8	7.4	7.0	6.0	5.4	4.6
235			9.4	10.4	10.6	8.6	8.4	7.2	6.8	5.8	5.2	4.2
240			8.4	9.4	9.6	7.6	8.0	6.8	6.4	5.6	5.0	4.0
245			8.4	8.6	6.8	7.2	6.6	6.2	5.4	4.8	3.8	3.2
250			7.4	7.8	5.8	6.2	6.2	6.0	5.2	4.6	3.6	3.0
255			6.6	7.0	5.0	5.2	5.6	5.8	4.8	4.4	3.4	2.8
260			5.8	6.0	4.0	4.4	4.8	5.4	4.6	4.2	3.4	2.6
265			5.2	3.2	3.6	4.0	4.8	4.4	3.8	3.2	2.6	
270			4.4	2.6	2.8	3.2	4.0	3.8	3.6	3.0		
275			3.8			2.4	3.2	3.0	3.4	2.8		
280			3.0				2.4	2.2	3.2	2.4		
285									2.6			

GMK 7550

GROVE

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE. The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.

load charts



179 ft



39 - 230 ft.



264,500 lbs.

100%
29' 2" Spread

360°



Pounds (thousands)

Ft	179'											
Ft	39.0	59.0	79.0	98.0	118.0	138.0	151	171.0	190.0	210.0	230.0	
	3°	3°	3°	3°	3°	3°	3° 25°	3° 25°	3° 25°	3° 25°	3° 25°	
45												
50	87.0	78.0										
55	83.0	75.0										
60	80.0	72.0	60.0									
65	76.0	68.0	58.0									
70	72.0	65.0	56.0	47.0								
75	68.0	61.0	54.0	46.0	38.6							
80	65.0	58.0	52.0	44.0	37.4	31.4	25.8	24.6				
85	61.0	55.0	49.0	43.0	36.2	29.8	25.0	23.8				
90	57.0	52.0	47.0	41.6	35.0	28.2	24.2	22.8	20.8			
95	54.0	50.0	45.0	40.2	34.0	27.0	23.2	22.0	20.0	17.2		
100	51.0	47.0	43.4	38.8	32.8	26.2	22.4	21.2	19.4	17.4	16.6	
105	49.0	45.0	41.6	37.4	31.4	25.4	21.6	20.6	18.6	16.8	16.0	
110	46.0	43.0	39.8	35.8	30.2	24.6	20.8	19.8	18.0	16.2	15.6	
115	44.0	41.0	38.0	34.6	28.8	24.0	20.2	19.2	17.2	15.6	15.0	
120	41.8	39.2	36.4	33.2	27.6	23.2	19.4	18.6	16.6	15.0	14.4	
125	39.8	37.2	35.0	31.8	26.6	22.6	18.8	18.0	16.0	14.6	14.0	
130	37.8	35.4	33.6	30.6	25.8	21.8	18.2	17.4	15.4	14.0	13.4	
135	35.8	33.6	32.2	29.2	25.0	21.2	17.6	16.8	15.0	13.6	13.0	
140	34.0	31.8	30.6	27.8	24.2	20.6	17.0	16.2	14.4	13.0	12.4	
145	32.0	30.0	29.2	26.6	23.4	20.0	16.4	15.6	14.0	12.6	12.0	
150	30.4	28.2	28.0	25.2	22.6	19.4	16.0	15.2	13.4	12.2	11.4	
155	28.8	26.4	26.6	23.8	21.8	18.8	15.4	14.8	13.0	11.8	11.0	
160	27.2	25.0	25.2	22.6	21.0	18.2	14.8	14.2	12.4	11.4	10.6	
165	25.6	24.0	23.8	21.6	20.2	17.6	14.4	13.8	12.0	11.0	10.2	
170	24.0	22.8	22.4	20.8	19.4	17.2	13.8	13.4	11.6	10.6	9.8	
175	22.2	21.8	21.2	20.0	18.6	16.6	13.4	13.0	11.2	10.2	9.6	
180	21.0	20.8	20.4	19.2	17.8	16.0	13.0	12.6	10.8	10.0	9.2	
185	19.2	19.6	19.4	18.4	17.2	15.4	12.6	12.2	10.4	9.6	8.8	
190	17.6	18.6	18.6	17.4	16.6	14.8	12.0	11.8	10.2	9.4	8.4	
195	16.2	17.2	17.6	16.6	15.8	14.4	11.6	11.4	9.8	9.0	8.2	
200	14.8	15.8	16.8	16.0	15.2	13.8	11.2	11.0	9.4	8.8	7.8	
205	14.4	15.8	15.2	14.6	13.2	10.6	10.6	9.2	8.4	7.6	6.6	
210	13.2	14.6	14.6	13.8	12.8	10.2	10.2	8.8	8.2	7.4	6.4	
215	12.0	13.4	13.8	13.2	12.2	9.8	9.8	8.4	7.8	7.0	6.2	
220	10.8	12.2	13.0	12.8	11.6	9.2	9.2	8.2	7.6	6.8	6.0	
225	11.2	12.0	12.2	11.2	8.8	8.8	7.8	7.4	6.6	5.8	5.0	
230	10.0	10.8	11.6	10.6	8.4	8.4	7.4	7.0	6.2	5.4	4.8	
235	9.0	9.8	10.6	10.2	7.8	8.0	7.0	6.8	6.0	5.2	4.6	
240	8.2	8.8	9.6	9.6	7.4	7.6	6.6	6.4	5.6	5.0	4.2	
245	7.8	8.6	8.8	8.8	6.8	7.2	6.2	6.2	5.4	4.8	4.0	
250	7.0	7.8	7.8	7.8	5.8	6.2	5.8	5.8	5.0	4.6	3.8	
255	6.0	6.8	7.0	5.0	5.4	5.4	5.6	4.8	4.6	3.6	3.0	
260	5.2	6.0	6.2	4.2	4.4	4.8	5.2	4.4	4.4	3.2	2.8	
265	5.2	5.2	5.4	3.4	3.6	4.0	4.8	4.0	4.2	3.0	2.6	
270	4.4	4.6	4.6	2.6	2.8	3.2	4.0	3.6	3.8	2.8	2.6	
275	3.8	3.8	3.8			2.4	3.2	2.8	3.6	2.6	2.4	
280	3.0	3.2					2.4	3.2	3.2			
285		2.4						2.6				


41

GMK7550

working range

Special offset lattice extension

42

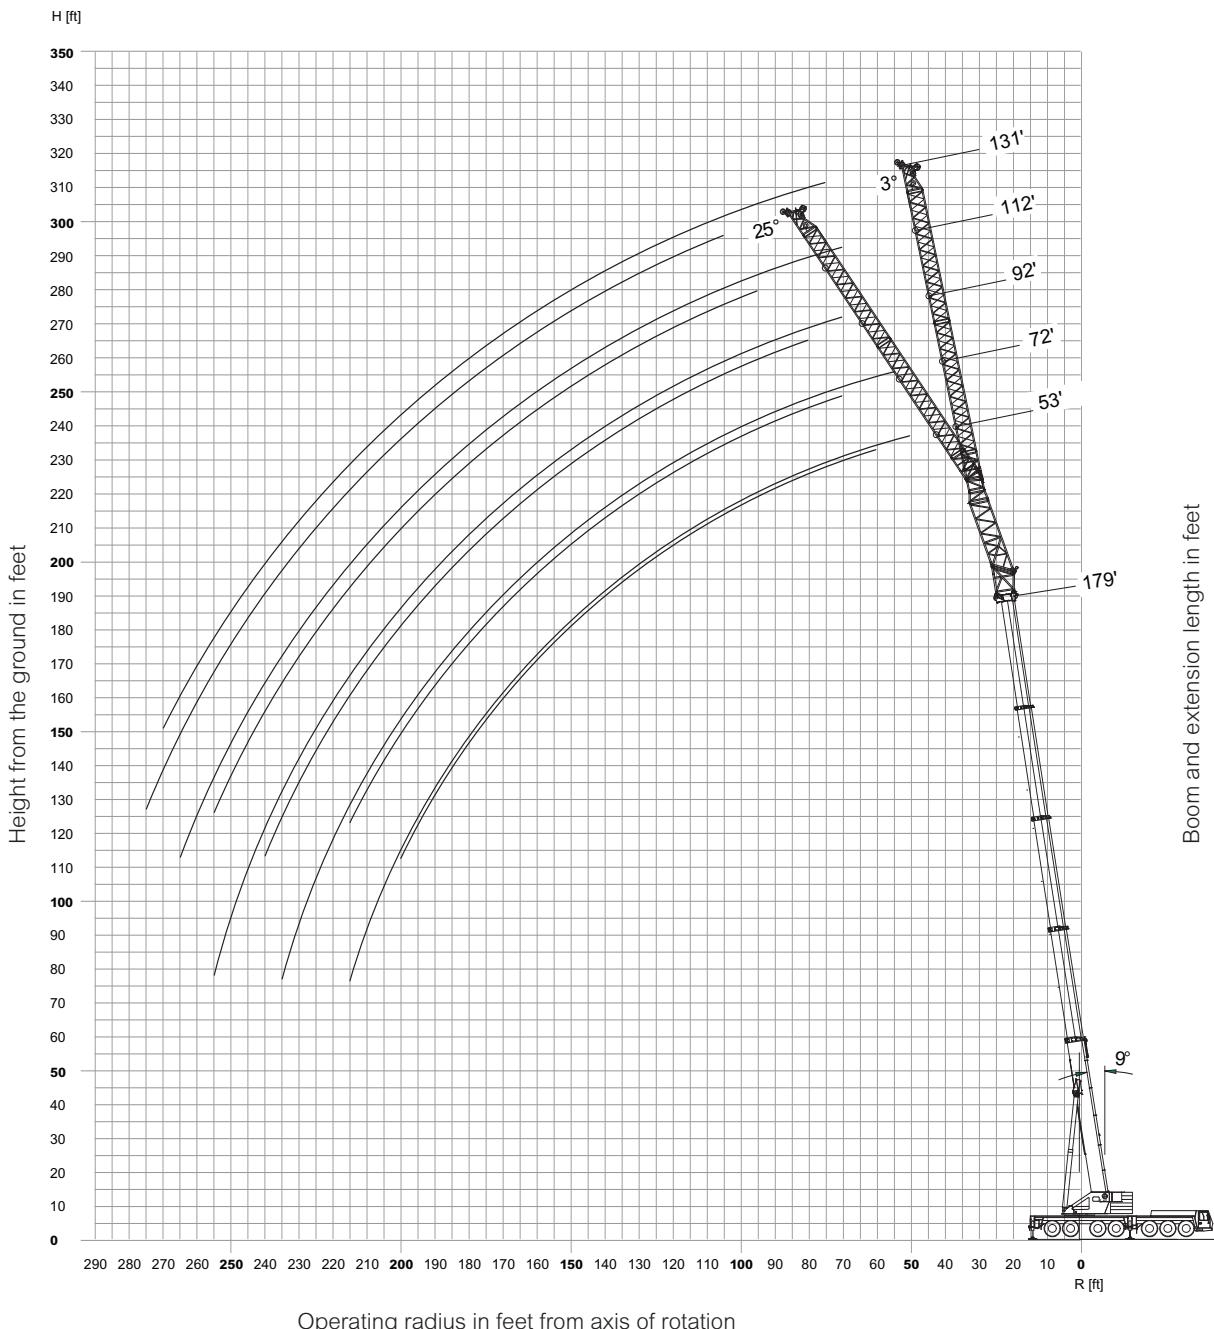

GMK 7550

GROVE

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE. The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.

load charts



163 ft
52.5 - 131.2 ft.



264,500 lbs.



100%
29' 2" Spread



360°

	Pounds (thousands)											
	163'											
Ft	52.5		72.2		91.9		111.6		131.2			
	3°	25°	3°	25°	3°	25°	3°	25°	3°	25°	3°	25°
45	97.0											
50	94.0		74.0									
55	88.0	79.0	71.0									
60	82.0	77.0	69.0		54.0		43.2					
65	78.0	74.0	66.0		52.0		41.6					
70	73.0	71.0	63.0	51.0	50.0		40.0		34.6			
75	69.0	67.0	61.0	49.0	48.0		38.4		33.2			
80	65.0	64.0	58.0	48.0	47.0	36.4	37.0		32.0			
85	61.0	60.0	55.0	46.0	45.0	35.4	35.6		30.6			
90	57.0	57.0	53.0	45.0	43.4	34.4	34.4	25.0	29.0			
95	54.0	53.0	50.0	43.8	42.0	33.4	33.2	24.4	27.4			
100	51.0	51.0	48.0	42.8	40.6	32.6	32.2	23.8	26.0	19.8		
105	48.0	48.0	45.0	41.6	39.2	31.6	31.0	23.2	25.2	19.2		
110	46.0	46.0	43.4	40.4	38.0	30.6	29.8	22.6	24.4	18.8		
115	43.2	43.4	41.4	39.0	36.6	29.4	28.6	22.0	23.6	18.2		
120	41.2	41.2	39.4	37.8	35.4	28.2	27.4	21.4	22.8	17.8		
125	39.0	39.2	37.4	36.4	34.2	27.0	26.2	21.0	22.2	17.4		
130	37.0	37.2	35.4	35.2	33.0	26.6	25.2	20.4	21.4	17.0		
135	35.0	35.2	33.4	33.6	31.8	26.0	24.4	20.0	20.8	16.6		
140	32.8	33.4	31.6	31.8	30.6	25.4	23.8	19.6	20.2	16.2		
145	31.2	31.4	29.6	30.0	29.2	24.8	23.0	19.2	19.6	15.8		
150	29.4	29.8	27.8	28.2	27.6	24.2	22.4	18.8	19.0	15.4		
155	27.8	28.0	26.0	26.4	26.2	23.6	21.8	18.4	18.6	15.0		
160	26.0	26.4	24.4	25.0	24.8	23.0	21.2	18.0	18.0	14.8		
165	24.4	24.8	23.4	23.8	23.2	22.4	20.6	17.6	17.6	14.4		
170	22.6	23.2	22.2	22.8	21.8	21.8	19.8	17.4	17.0	14.2		
175	20.6	21.2	21.2	21.6	20.8	21.2	19.2	17.0	16.6	13.8		
180	18.8	19.4	20.0	20.4	19.8	20.4	18.6	16.8	16.2	13.6		
185	17.2	17.6	19.0	19.4	19.0	19.6	17.8	16.4	15.8	13.4		
190	15.6	16.0	17.4	18.2	18.0	18.6	17.2	16.2	15.4	13.2		
195	14.0		15.8	17.0	17.0	17.6	16.4	15.6	15.0	13.0		
200	12.6		14.4	15.4	16.0	16.8	15.8	15.2	14.6	12.6		
205			13.0		14.6	15.8	15.0	14.8	14.2	12.4		
210			11.8		13.2	15.0	14.2	14.2	13.8	12.2		
215			10.6		12.0	13.6	13.2	13.8	13.2	12.0		
220			9.4		10.8	12.2	12.0	13.2	12.4	11.6		
225					9.8		11.0	12.8	11.8	11.4		
230					8.8		9.8	11.6	10.8	11.2		
235					7.8		8.8	10.4	9.8	11.0		
240					6.8		7.8	9.2	8.8	10.6		
245							6.8		7.8	10.2		
250							6.0		6.8	9.0		
255							5.0		6.0	7.8		
260							4.2		5.2	6.8		
265									4.4			
270									3.6			
275												
280												

43

GMK7550

load charts



44

	Ft		52.5		72.2		91.9		111.6		131.2	
	Ft		3°	25°	3°	25°	3°	25°	3°	25°	3°	25°
45												
50	81.0											
55	77.0				67.0							
60	73.0		71.0		65.0							
65	70.0		67.0		61.0							
70	66.0		64.0		58.0		50.0		49.0		40.4	
75	63.0		61.0		55.0		48.0		47.0		39.0	
80	59.0		57.0		53.0		47.0		46.0		36.0	
85	56.0		54.0		50.0		46.0		44.0		35.0	
90	53.0		52.0		48.0		44.0		42.6		34.2	
95	50.0		49.0		46.0		43.0		41.2		33.2	
100	47.0		47.0		43.6		41.6		39.6		32.4	
105	45.0		45.0		41.6		40.0		38.0		31.6	
110	43.0		42.6		39.6		38.4		36.4		30.8	
115	40.8		40.6		38.0		36.8		34.8		30.0	
120	38.8		38.6		36.4		35.2		33.2		29.0	
125	36.6		36.8		34.8		33.4		31.8		28.0	
130	34.6		34.8		33.0		31.6		30.2		27.0	
135	32.8		32.8		31.4		29.8		28.6		26.0	
140	30.8		31.0		29.8		28.2		27.2		25.2	
145	28.8		29.0		28.4		27.0		25.6		24.4	
150	27.0		27.2		26.8		25.8		24.4		23.6	
155	25.2		25.4		25.4		24.8		23.4		23.0	
160	24.0		24.2		23.8		23.6		22.4		22.2	
165	22.8		23.2		22.4		22.6		21.4		21.4	
170	21.8		22.0		21.2		21.6		20.6		19.0	
175	20.6		20.8		20.2		20.6		19.6		18.8	
180	19.4		19.6		19.2		19.6		18.6		17.6	
185	18.0		18.4		18.2		18.6		17.8		18.0	
190	16.4		17.0		17.4		17.8		17.0		17.4	
195	15.0		15.4		16.4		16.8		16.2		16.2	
200	13.6		14.0		15.0		15.8		15.4		14.6	
205	12.2				13.8		15.0		14.6		15.0	
210	11.0				12.4		13.6		13.8		13.2	
215	9.8				11.2		12.2		12.8		13.6	
220					10.0		11.6		12.8		12.0	
225					9.0		10.4		11.8		12.0	
230					7.8		9.4		10.6		10.0	
235					6.8		8.4		9.4		9.0	
240							7.4		8.2		8.0	
245							6.4		7.2		8.6	
250							5.4		6.2		7.6	
255							4.6		5.4		6.6	
260									4.6		5.2	
265									3.8		4.4	
270											3.6	
275											5.4	
280											4.4	

GMK 7550


GROVE

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE. The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.

Working Range w/MegaWingLift

78.7 ft. Lattice Extension Jib

45

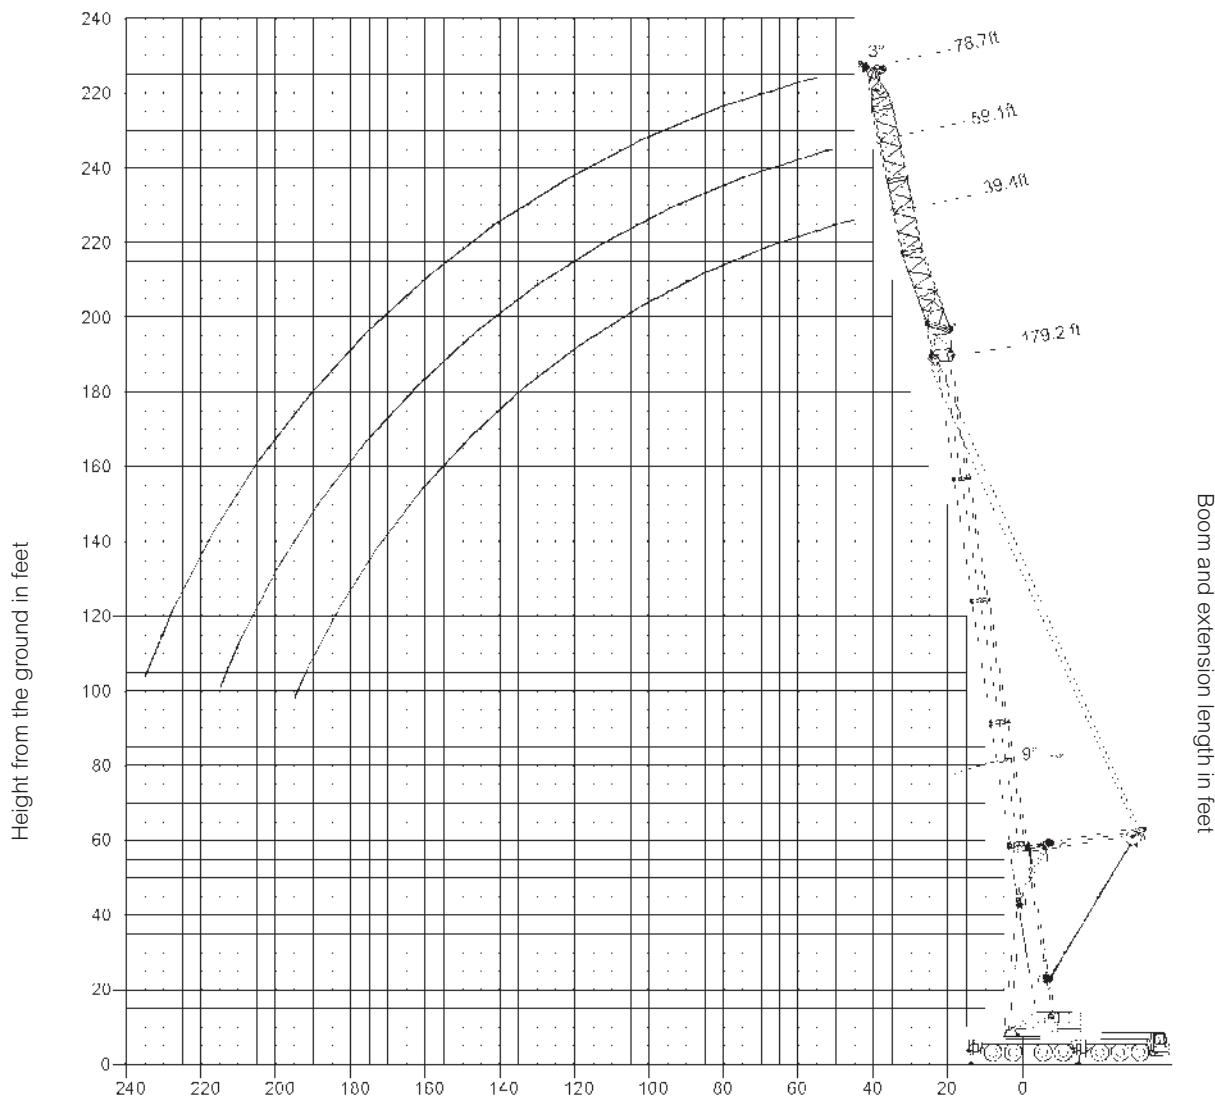

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE. The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.

GROVE

GMK 7550 w/MWL

load charts w/MegaWingLift

163-179 ft.

39.4-78.7 ft.

352,700 lbs.

100°
29'-2" spread

360°

46

Pounds (thousands)


Feet	163'			179'		
Feet	39.4'	59.1'	78.7'	39.4'	59.1'	78.7'
	3°	3°	3°	3°	3°	3°
40	114.0					
45	107.0	86.0		100.0		
50	100.0	81.0	66.0	94.0	78.0	
55	95.0	77.0	63.0	88.0	74.0	62.0
60	90.0	73.0	61.0	83.0	69.0	59.0
65	85.0	69.0	58.0	79.0	65.0	56.0
70	81.0	65.0	55.0	74.0	62.0	52.0
75	77.0	62.0	52.0	71.0	58.0	50.0
80	73.0	59.0	49.0	68.0	55.0	48.0
85	69.0	56.0	47.0	65.0	52.0	45.0
90	67.0	53.0	45.0	62.0	50.0	43.2
95	64.0	51.0	43.2	59.0	48.0	41.4
100	62.0	49.0	41.4	56.0	46.0	39.8
105	59.0	47.0	39.4	54.0	43.8	38.2
110	57.0	45.0	38.0	52.0	42.2	36.6
115	55.0	43.4	36.8	49.0	40.8	35.0
120	53.0	41.8	35.4	47.0	39.4	33.6
125	51.0	40.2	34.2	46.0	37.8	32.2
130	49.0	39.0	32.8	44.0	36.4	30.8
135	47.0	37.8	31.4	43.0	35.0	29.4
140	46.0	36.6	30.4	41.6	33.8	28.0
145	45.0	35.4	29.2	40.2	32.4	26.6
150	43.4	34.2	28.0	38.8	31.2	25.8
155	40.8	33.2	27.0	37.8	29.8	25.0
160	38.2	32.4	25.8	36.8	28.6	24.2
165	35.6	31.4	24.6	35.8	27.4	23.6
170	33.4	30.6	23.8	34.4	26.6	22.8
175	31.2	29.8	23.2	32.2	26.0	22.0
180	29.2	28.8	22.6	30.2	25.2	21.4
185		28.0	22.0	28.2	24.6	20.8
190		27.0	21.4	26.4	23.8	20.2
195		25.4	20.8	24.6	23.2	19.6
200		23.6	20.2		22.8	19.2
205			19.8		22.2	18.6
210			19.4		21.2	18.0
215			19.0		19.8	17.6
220			18.4			17.2
225						16.8
230						16.4
235						16.0

GMK 7550 w/MWL

working range

Heavy duty jib - 13 ft.

47

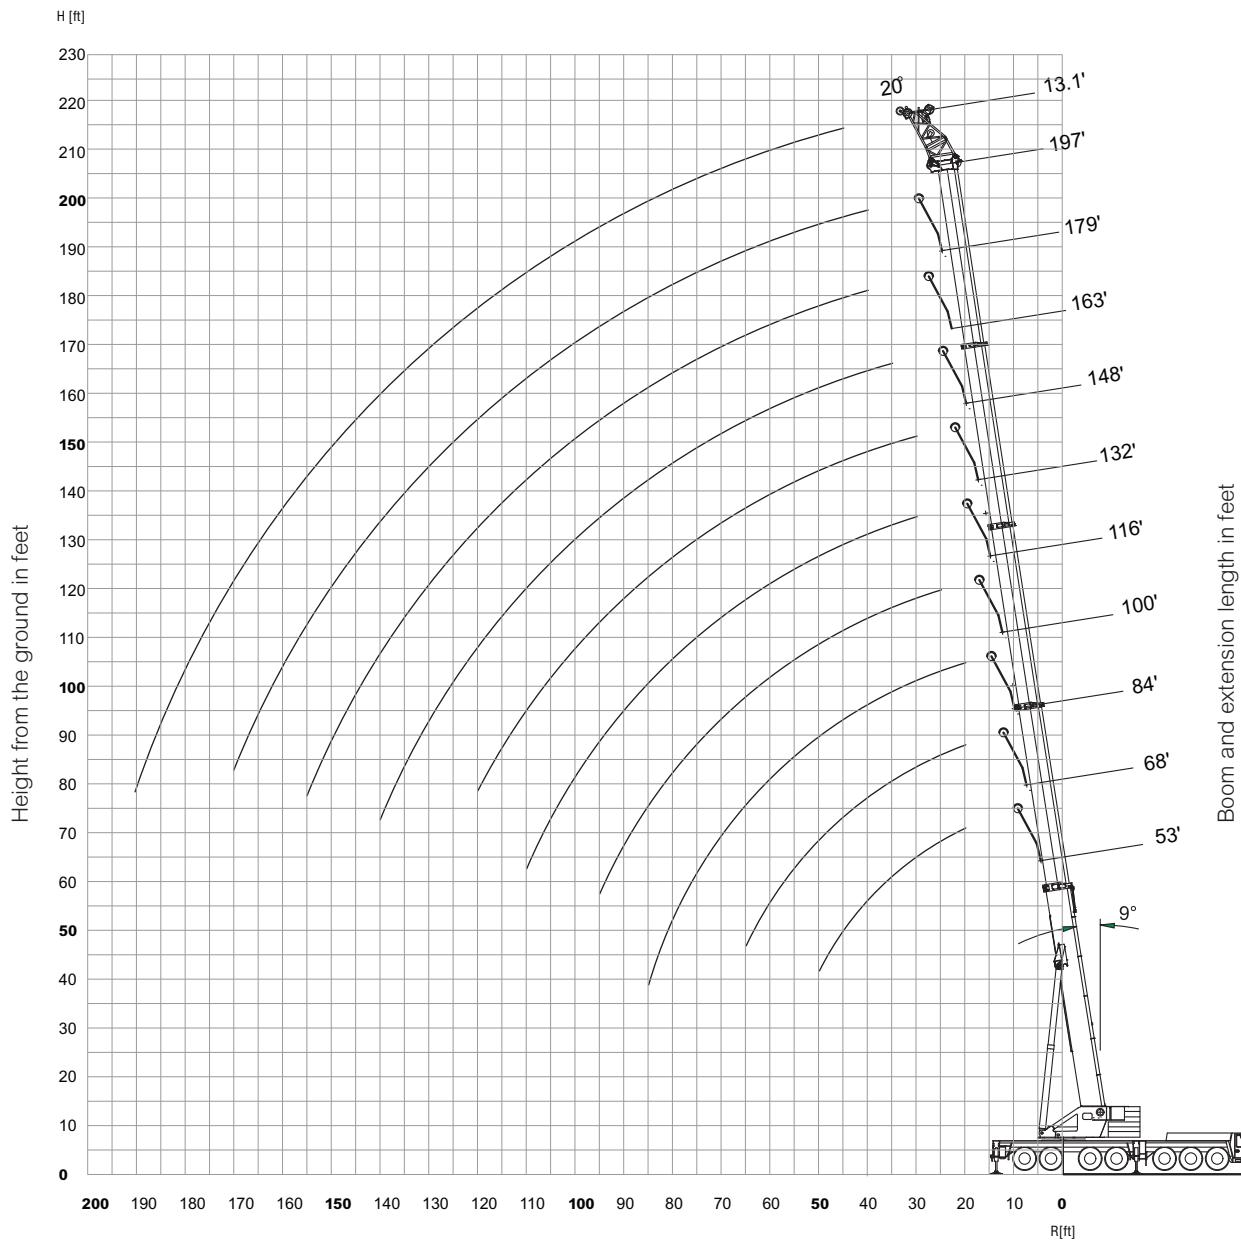

Operating radius in feet from axis of rotation

GMK 7550

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE. The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.


GROVE

load charts

48



Ft	52.6	68.4	84.3	100.1	115.9	131.7	147.6	163.4	179.2	196.9
20	190.0	190.0	190.0							
25	190.0	190.0	190.0	190.0						
30	190.0	190.0	190.0	190.0	190.0					
35	190.0	190.0	190.0	190.0	182.0	166.0				
40	190.0	190.0	190.0	190.0	181.0	167.0	153.0	138.0	120.0	
45	190.0	190.0	190.0	185.0	164.0	151.0	140.0	129.0	116.0	104.0
50	190.0	190.0	187.0	170.0	151.0	140.0	130.0	121.0	109.0	99.0
55		171.0	169.0	156.0	138.0	129.0	120.0	113.0	102.0	94.0
60		154.0	151.0	143.0	128.0	118.0	110.0	105.0	96.0	89.0
65		138.0	135.0	132.0	119.0	109.0	102.0	98.0	91.0	84.0
70			120.0	121.0	110.0	102.0	95.0	91.0	85.0	79.0
75			107.0	108.0	103.0	95.0	88.0	85.0	80.0	74.0
80			96.0	97.0	97.0	88.0	82.0	79.0	75.0	71.0
85			86.0	88.0	88.0	83.0	77.0	74.0	71.0	67.0
90				79.0	80.0	78.0	73.0	70.0	67.0	63.0
95					72.0	73.0	74.0	68.0	66.0	63.0
100						66.0	68.0	64.0	62.0	60.0
105						60.0	62.0	61.0	58.0	57.0
110						55.0	57.0	58.0	55.0	54.0
115							52.0	54.0	52.0	51.0
120							48.0	50.0	49.0	48.0
125								46.0	47.0	45.0
130								42.2	45.0	43.4
135								39.0	41.2	41.4
140								36.0	38.2	39.4
145									35.4	37.4
150									32.8	34.8
155									30.4	32.4
160									30.2	29.2
165									28.0	27.4
170									26.2	25.6
175										24.4
180										22.6
185										21.0
190										19.4

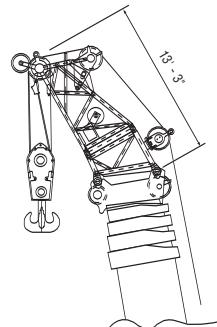

GMK 7550


GROVE

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE. The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.

working range

Heavy duty jib - 24 ft.

49

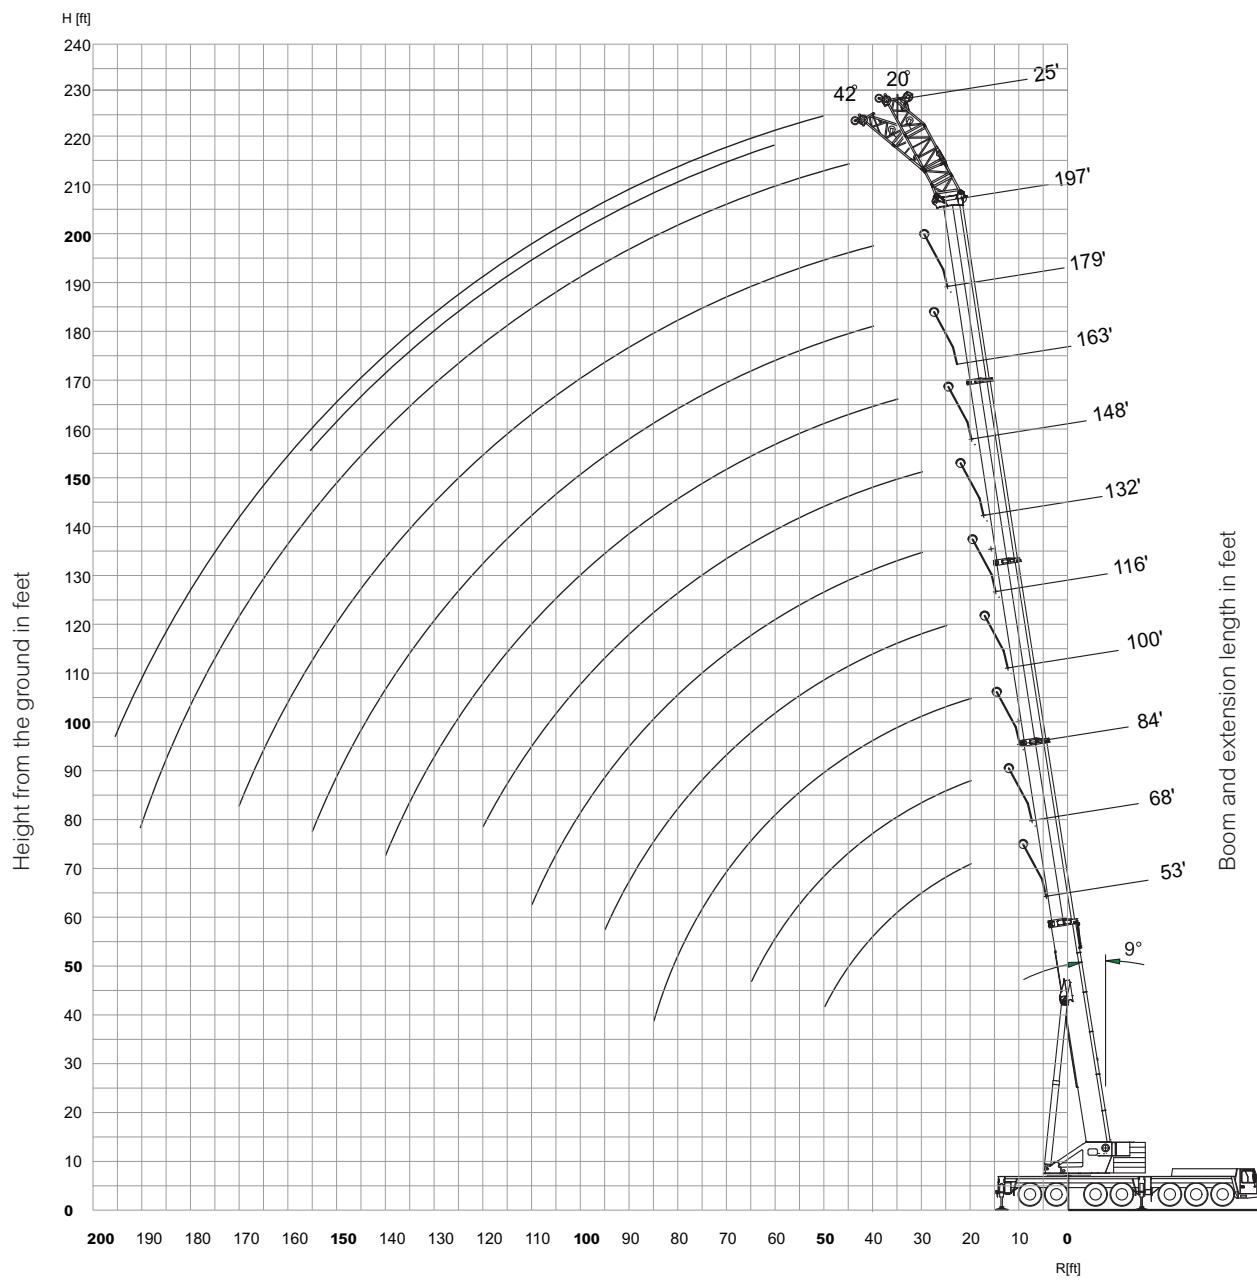

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE. The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.

GROVE


GMK 7550

load charts



50

Ft	52.6		68.4		84.3		100.1		115.9		131.7		147.6		163.4		179.2		196.9									
	20°	42°	20°	42°	20°	42°	20°	42°	20°	42°	20°	42°	20°	42°	20°	42°	20°	42°	20°	42°								
20	118.0		122.0																									
25	107.0	94.0	113.0	97.0	117.0																							
30	100.0	89.0	106.0	93.0	110.0	95.0	114.0	96.0	115.0																			
35	93.0	85.0	100.0	89.0	104.0	91.0	108.0	93.0	110.0	94.0	111.0																	
40	88.0	81.0	94.0	85.0	99.0	88.0	103.0	90.0	105.0	91.0	107.0	92.0	106.0	92.0	104.0													
45	84.0	79.0	89.0	83.0	95.0	85.0	99.0	88.0	101.0	89.0	103.0	90.0	103.0	90.0	101.0		97.0											
50	79.0	77.0	85.0	80.0	91.0	83.0	95.0	85.0	98.0	87.0	100.0	88.0	100.0	87.0	99.0	87.0	95.0	84.0	88.0									
55	76.0		82.0	78.0	87.0	81.0	91.0	83.0	94.0	85.0	96.0	86.0	97.0	86.0	95.0	85.0	91.0	83.0	84.0									
60	75.0		79.0	77.0	83.0	79.0	88.0	81.0	91.0	83.0	93.0	84.0	94.0	84.0	91.0	83.0	87.0	82.0	80.0	78.0								
65	74.0		76.0	76.0	81.0	78.0	85.0	80.0	88.0	81.0	91.0	82.0	92.0	83.0	87.0	82.0	83.0	80.0	76.0	75.0								
70			75.0		79.0	77.0	82.0	78.0	86.0	80.0	88.0	81.0	87.0	80.0	83.0	80.0	78.0	76.0	72.0	72.0								
75			75.0		76.0	76.0	80.0	78.0	83.0	79.0	85.0	80.0	82.0	78.0	79.0	78.0	73.0	72.0	68.0	68.0								
80					74.0		78.0	77.0	80.0	77.0	81.0	77.0	78.0	75.0	75.0	74.0	69.0	69.0	65.0	65.0								
85							74.0		76.0	76.0	78.0	75.0	77.0	74.0	73.0	73.0	70.0	66.0	65.0	61.0	61.0							
90									74.0	76.0	75.0	73.0	73.0	72.0	69.0	69.0	66.0	66.0	62.0	62.0	58.0	58.0						
95										73.0		72.0	71.0	69.0	69.0	65.0	65.0	62.0	63.0	58.0	59.0	54.0	55.0					
100										68.0		68.0		65.0	66.0	61.0	61.0	59.0	60.0	55.0	55.0	52.0	52.0					
105											62.0		62.0		62.0	62.0	57.0	57.0	56.0	56.0	53.0	53.0	49.0	49.0				
110											56.0		57.0		58.0	59.0	53.0	54.0	52.0	53.0	50.0	50.0	47.0	47.0				
115												52.0		54.0		51.0	51.0	49.0	50.0	48.0	48.0	44.0	45.0					
120													48.0		49.0	49.0	48.0	47.0	47.0	45.0	45.0	42.0	42.4					
125														45.0		46.0	46.0	44.0	45.0	42.8	43.0	40.0	40.4					
130															41.4		42.8	42.2	42.4	40.4	40.8	38.2	38.6					
135																38.0		39.4	40.2	40.2	38.4	39.0	36.2	36.6				
140																	36.4		38.0	36.4	37.2	34.4	34.8					
145																		33.4		35.4	34.4	34.4	32.6	32.8				
150																		30.6		32.8	32.4	30.8	31.0					
155																			30.2		30.4	29.2	29.4					
160																				27.8		28.4	27.6					
165																					27.0		26.2					
170																						25.2		24.6				
175																							23.4		23.0			
180																							21.6		21.4			
185																								19.8				
190																								18.2				
195																								16.8				

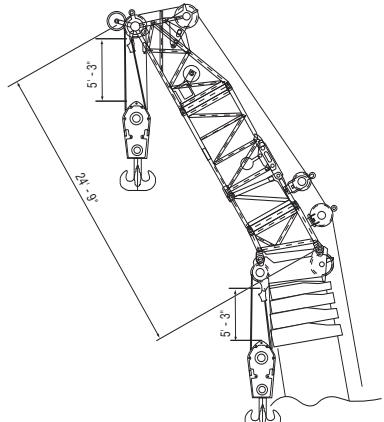

GMK 7550


GROVE

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE. The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.

Working Range w/MegaWing Lift

Heavy Duty Jib 13 ft.

51

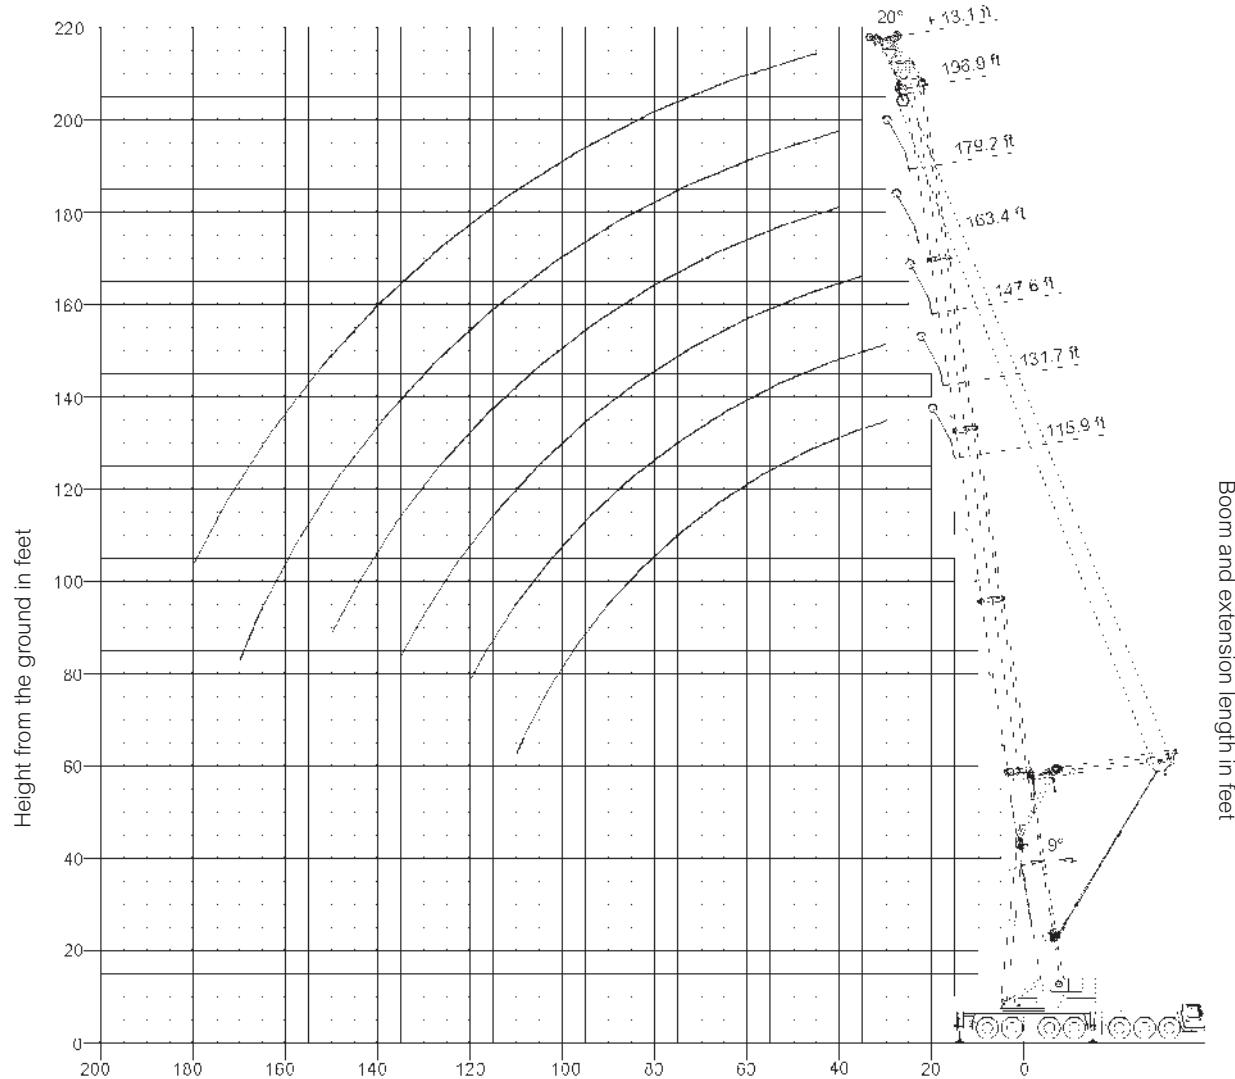

Operating radius in feet from axis of rotation

GMK7550 w/MWL

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE. The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.

GROVE

load charts w/MegaWingLift

116-197 ft.

13.1 ft.

352,700 lbs.

100%
29'-2" spread

360°

52


					Pounds (thousands)
Feet	116'	132'	148'	163'	179'
Feet	13.1'	13.1'	13.1'	13.1'	13.1'
	20°	20°	20°	20°	20°
30	190.0	190.0			
35	190.0	190.0	190.0		
40	190.0	190.0	190.0	171.0	148.0
45	190.0	190.0	188.0	162.0	139.0
50	187.0	186.0	175.0	154.0	132.0
55	173.0	175.0	165.0	146.0	125.0
60	157.0	159.0	155.0	140.0	119.0
65	143.0	145.0	145.0	134.0	113.0
70	131.0	133.0	134.0	128.0	108.0
75	120.0	123.0	123.0	122.0	103.0
80	111.0	113.0	113.0	115.0	99.0
85	102.0	104.0	104.0	106.0	95.0
90	94.0	97.0	97.0	99.0	91.0
95	88.0	90.0	90.0	92.0	84.0
100	81.0	84.0	84.0	86.0	81.0
105	76.0	78.0	78.0	80.0	76.0
110	69.0	73.0	73.0	75.0	73.0
115		68.0	68.0	70.0	70.0
120		63.0	63.0	66.0	68.0
125			59.0	61.0	63.0
130			55.0	57.0	59.0
135			51.0	54.0	55.0
140				50.0	52.0
145				47.0	49.0
150				44.0	46.0
155					43.0
160					40.6
165					38.2
170					35.2
175					33.8
180					31.8

GMK 7550 w/MWL

Working Range w/MegaWingLift

Heavy Duty Jib 24.6 ft.

53

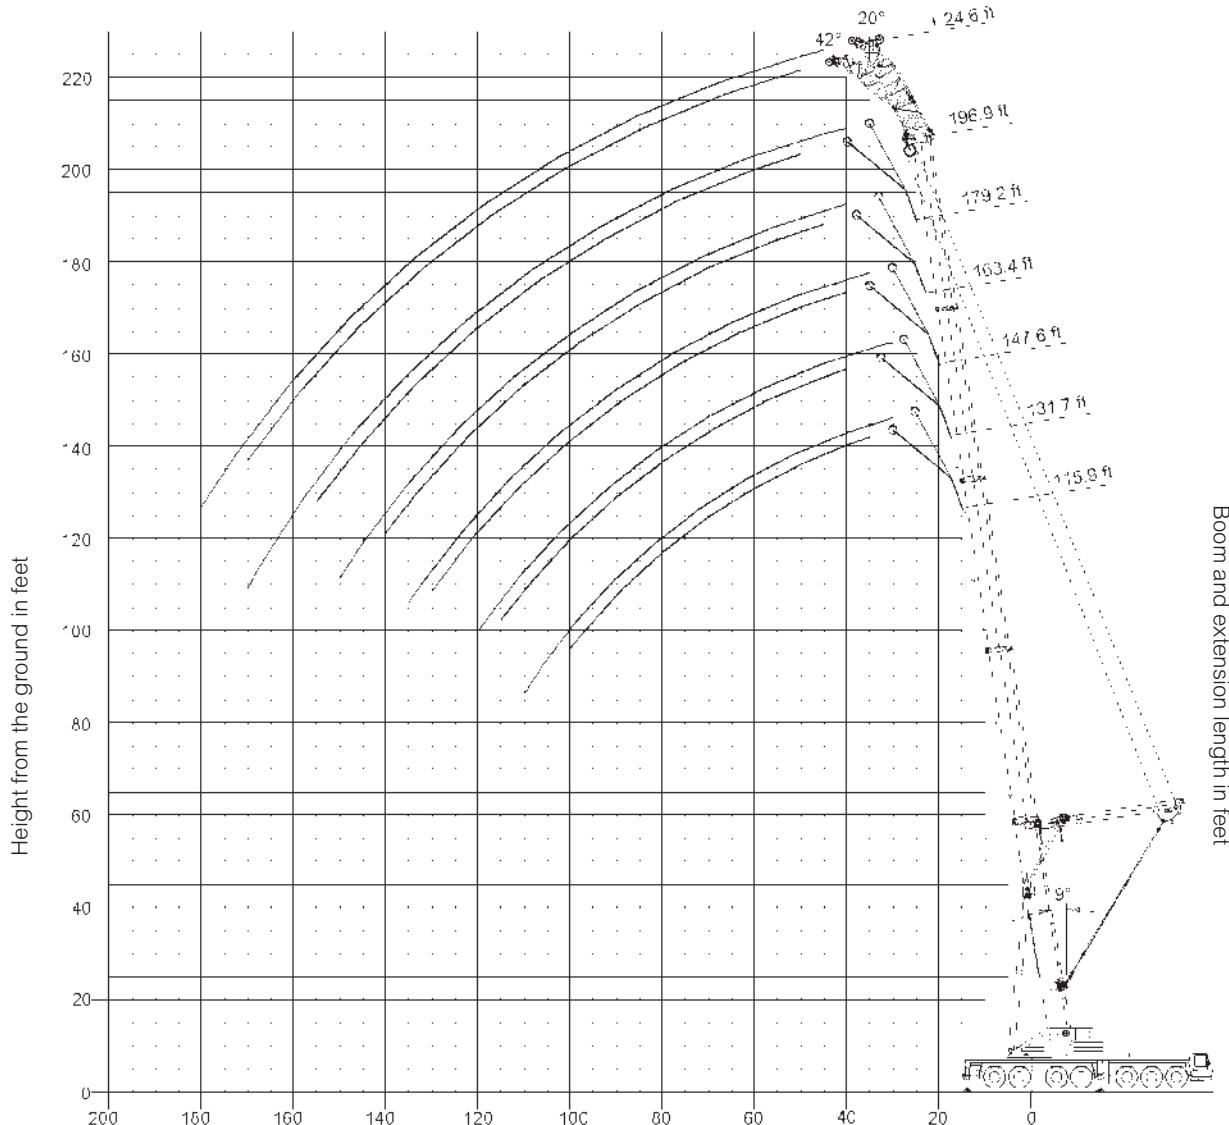

Operating radius in feet from axis of rotation

GMK 7550 w/MWL

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE. The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.

GROVE

load charts w/MegaWingLift



116-197 ft.



24.6 ft.



352,700 lbs.

100%
29'-2" spread

360°

54

Feet	Pounds (thousands)							
	116'	132'	148'	163'	179'	197'	20°	42°
20°	20°	42°	20°	42°	20°	42°	20°	42°
30	148.0	114.0	147.0	109.0	138.0	107.0		
35	140.0	110.0	140.0	109.0	131.0	104.0		
40	133.0	106.0	132.0	105.0	125.0	100.0	117.0	96.0
45	126.0	102.0	126.0	101.0	119.0	97.0	111.0	93.0
50	120.0	99.0	120.0	98.0	114.0	94.0	106.0	89.0
55	115.0	96.0	115.0	95.0	114.0	94.0	106.0	97.0
60	110.0	93.0	110.0	93.0	110.0	91.0	101.0	86.0
65	106.0	91.0	106.0	90.0	105.0	89.0	97.0	84.0
70	102.0	88.0	102.0	88.0	101.0	86.0	94.0	81.0
75	98.0	86.0	98.0	86.0	97.0	84.0	90.0	78.0
80	95.0	84.0	95.0	84.0	94.0	82.0	86.0	76.0
85	92.0	83.0	92.0	82.0	91.0	80.0	84.0	74.0
90	89.0	81.0	89.0	80.0	88.0	78.0	81.0	72.0
95	86.0	80.0	86.0	78.0	86.0	76.0	78.0	70.0
100	82.0		84.0		83.0		75.0	
105	77.0		79.0		74.0		73.0	
110	71.0		74.0		69.0		74.0	
115	66.0		68.0		69.0		65.0	
120	61.0		64.0		64.0		60.0	
125			59.0		56.0		64.0	
130			55.0		55.0		61.0	
135			51.0		52.0		53.0	
140					48.0		50.0	
145					45.0		47.0	
150					41.8		43.6	
155							40.8	
160							38.0	
165								37.2
170								35.0
175								32.8
180								30.8
185								28.8
190								27.0
195								25.2

GMK 7550 w/MWL

Notes

Symbols glossary

55

	Axle load		Lattice extension
	Boom elevation		Lights
	Boom telescoping		Luffing jib
	Brakes		Main boom
	Cab		Off road
	Counterweight		Oil
	Crane functions		Outriggers
	Crane travel		Outrigger controls
	Electrical Systems		Radius
	Engine		Rotation
	Fixed swingaway		Speed
	Frame		Steering
	Fuel tank capacity		Suspension
	Gear		Swing
	Gradeability		Tele-swingaway
	Heavy duty jib		Tires
	Main hoist		Transmission
	Auxiliary hoist		Travel speed
	Hook height		

GMK7550

GROVE

Regional Headquarters

Americas

Manitowoc, Wisconsin, USA

Tel: +1 920 684 6621

Fax: +1 920 683 6278

Shady Grove, Pennsylvania, USA

Tel: +1 717 597 8121

Fax: +1 717 597 4062

Regional Offices

Americas

Brazil

Alphaville

Tel: +55 11 3103 0200

Fax: +55 11 4688 2013

Mexico

Monterrey

Tel: +52 81 8124 0128

Fax: +52 81 8124 0129

Europe, Middle East, Africa

Algeria

Hydra

Tel: +21 3 21 48 1173

Fax: +21 3 21 48 1454

Czech Republic

Netvorice

Tel: +420 317 78 9313

Fax: +420 317 78 9314

France

Baudement

Tel: +33 385 28 2589

Fax: +33 385 28 0430

Cergy

Tel: +33 130 31 3150

Fax: +33 130 38 6085

Decines

Tel: +33 472 81 5000

Fax: +33 472 81 5010

Germany

Langenfeld

Tel: +49 21 73 8909-0

Fax: +49 21 73 8909 30

Hungary

Budapest

Tel: +36 13 39 8622

Fax: +36 13 39 8622

Italy

Parabiago

Tel: +390 331 49 3311

Fax: +390 331 49 3330

Europe, Middle East, Africa

Ecully, France

Tel: +33 472 18 2020

Fax: +33 472 18 2000

Asia - Pacific

Shanghai, China

Tel: +86 21 51113579

Fax: +86 21 51113578

Singapore

Tel: +65 6264 1188

Fax: +65 6862 4142

China

Beijing

Tel: +86 10 58674761

Fax: +86 10 58674760

Xi'an

Tel: +86 29 87891465

Fax: +86 29 87884504

Korea

Seoul

Tel: +82 2 3439 0400

Fax: +82 2 3439 0405

Philippines

Makati City

Tel: +63 2 844 9437

Fax: +63 2 844 4712

Factories

Brazil

Alphaville

China

Zhangjiagang

France

Charlieu

La Clayette

Moulins

Germany

Wilhelmshaven

India

Calcutta

Pune

Italy

Niella Tanaro

Portugal

Baltar

Fânzeres

Slovakia

Saris

U.S.A.

Manitowoc

Port Washington

Shady Grove

Constant improvement and engineering progress make it necessary that we reserve the right to make specification, equipment and price changes without notice. Illustrations shown may include optional equipment and accessories, and may not include all standard equipment.

©2008 MANITOWOC

Printed in USA

Form No. GMK7550 Product Guide

Part No. 02-413 / 0608 / 1M

