


MDT 289



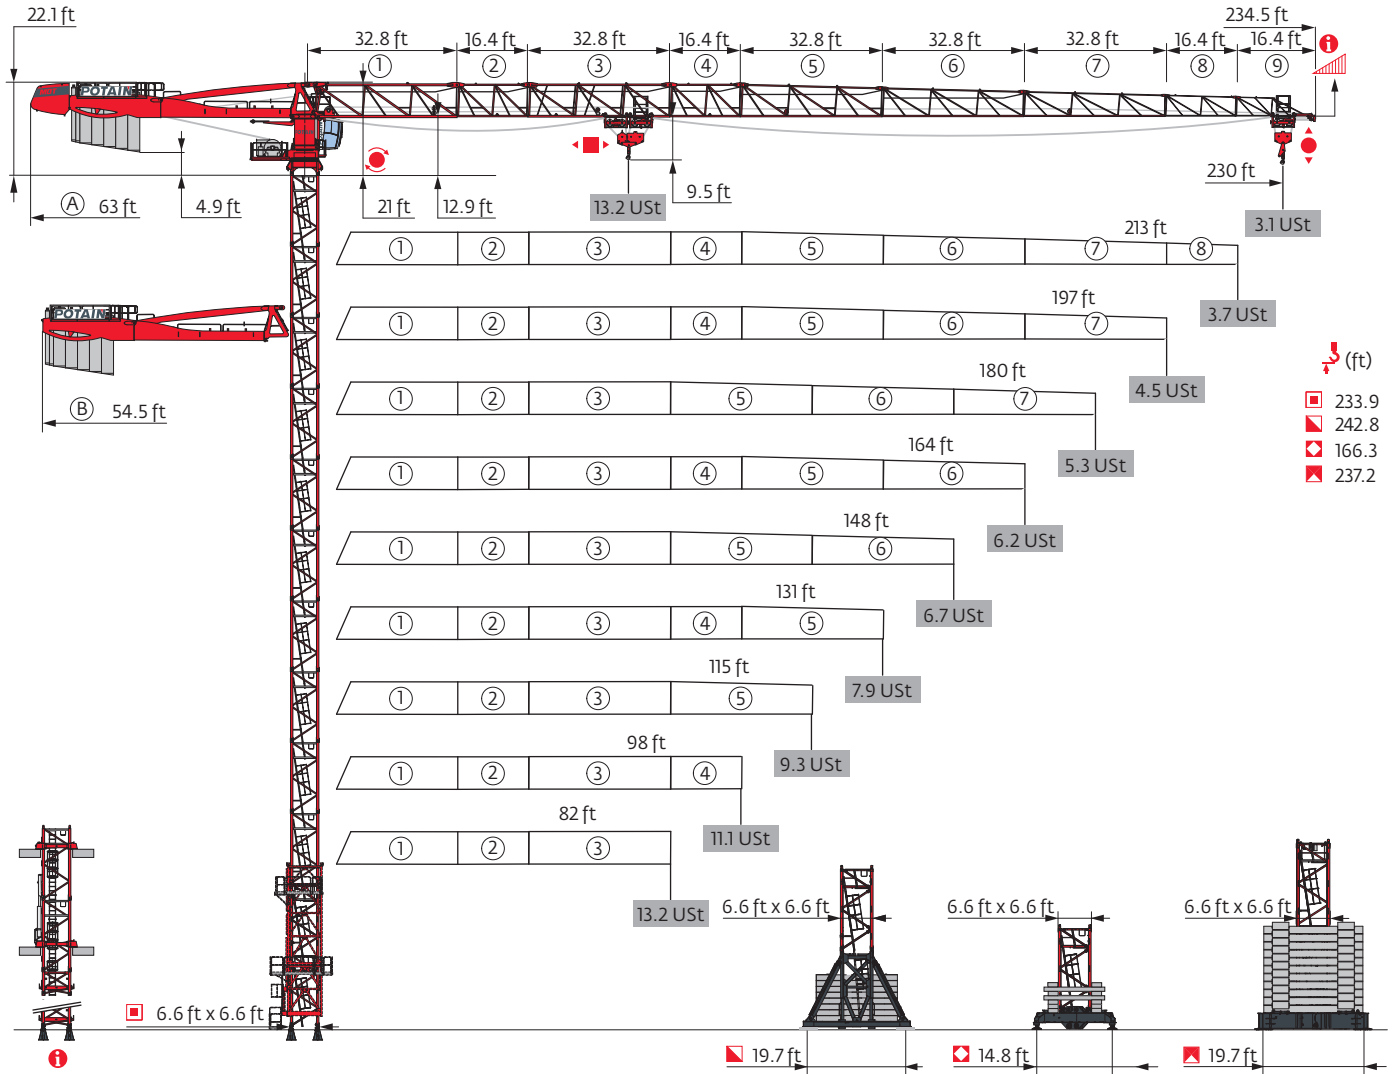


Potain Plus

Power Control


Top Site

Top Tracing 3






Mast - Reactions

6.6 ft - P 63A										
Height (ft)	82	98	115	131	148	164	180	197	213	230
Height (ft)	233.9	233.9	233.9	233.9	228.7	228.7	228.7	223.1	217.5	217.5
Height/P+ (ft)	233.9	233.9	233.9	233.9	228.7	228.7	228.7	223.1	217.5	217.5
Height	10.9 ft	0	0	0	1	1	1	2	0	0
	16.4 ft	12	12	12	11	11	11	10	11	11
	32.8 ft	1	1	1	1	1	1	1	1	1
F2 (Ust)	● 210	218	217	222	216	217	215	209	212	214
	■ 323	330	329	336	319	327	326	309	299	306
F3 (Ust)	● 154	159	157	161	154	155	153	146	149	151
	■ 273	278	276	281	264	271	271	253	243	250


6.6 ft - V 60A - 										
Height (ft)	82	98	115	131	148	164	180	197	213	230
Height (ft)	226.1	226.1	226.1	226.1	220.8	220.8	220.8	209.7	209.7	209.7
Height/P+ (ft)	226.1	226.1	226.1	226.1	220.8	220.8	220.8	209.7	209.7	209.7
Height	10.9 ft	1	1	1	2	2	2	1	1	1
	16.4 ft	12	12	12	12	11	11	11	11	11
F1 (Ust)	● 122	124	123	125	119	120	119	118	119	120
	■ 156	157	156	159	150	154	154	136	141	146

6.6 ft - V 63A - 										
Height (ft)	82	98	115	131	148	164	180	197	213	230
Height (ft)	237.2	237.2	237.2	242.8	237.2	237.2	237.2	220.8	220.8	220.8
Height/P+ (ft)	237.2	237.2	237.2	242.8	237.2	237.2	237.2	220.8	220.8	220.8
Height	10.9 ft	2	2	2	1	2	2	2	2	2
	16.4 ft	11	11	11	12	11	11	11	10	10
F1 (Ust)	● 136	135	134	141	135	136	135	126	127	128
	■ 176	178	177	188	178	182	183	155	161	165

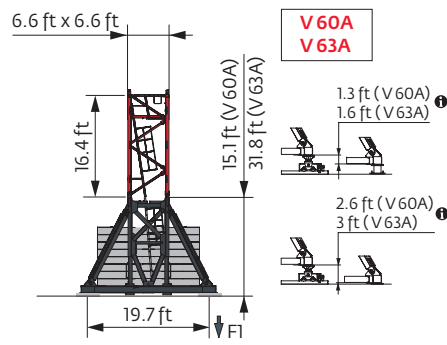


6.6 ft - ZD 463 - 

Height (ft)	82	98	115	131	148	164	180	197	213	230
Height (ft)	161.1	161.1	161.1	161.1	161.1	161.1	166.3	155.5	155.5	149.9
Height/P+ (ft)	161.1	155.5	161.1	155.5	161.1	161.1	161.1	155.5	149.9	149.9
Accessories	10.9 ft	2	2	2	2	2	1	0	0	1
	16.4 ft	8	8	8	8	8	9	9	9	8
FI (USt)	● 114	115	114	113	115	114	116	116	116	113
	■ 106	107	105	106	107	109	115	106	110	106

6.6 ft - ZX 640 - 

Height (ft)	82	98	115	131	148	164	180	197	213	230
Height (ft)	237.2	237.2	237.2	231.6	231.6	231.6	231.6	226.1	220.8	220.8
Height/P+ (ft)	237.2	237.2	237.2	231.6	231.6	231.6	231.6	226.1	220.8	220.8
Accessories	10.9 ft	0	0	1	1	1	1	2	0	0
	16.4 ft	12	12	12	11	11	11	10	11	11
	32.8 ft	1	1	1	1	1	1	1	1	1
FI (USt)	● 130	134	134	131	134	132	131	130	130	131
	■ 170	173	173	168	166	170	170	160	155	159

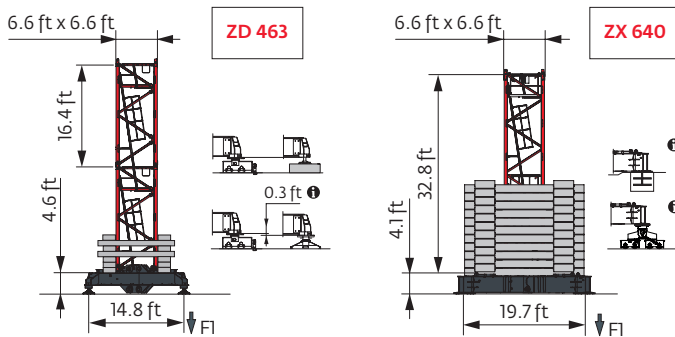

Note: When "ASCE" is noted in this data sheet it is referring to 115 mph Wind Zone, Exposure B, Design Wind Speed = 98 mph. See back cover for design wind speed calculations.

i Motorized accesses: adapted mast compositions, base ballast and reactions.

Other mast compositions - Please consult us

Anchorage

i

Base ballast

Ust) / 6.6 ft - V 60A -

(ft)	82	98	115	131	148	164	180	197	213	230
226.1	145.5	145.5	145.5	145.5						
220.8	145.5	145.5	132.3	132.3	132.3	132.3	132.3			
209.7	132.3	119.1	119.1	119.1	119.1	119.1	119.1	132.3	132.3	132.3
193.2	105.8	105.8	105.8	105.8	105.8	92.6	92.6	105.8	105.8	105.8
176.8	92.6	92.6	92.6	79.4	92.6	79.4	79.4	92.6	92.6	92.6
160.4	79.4	79.4	79.4	66.1	66.1	66.1	66.1	79.4	79.4	79.4
144	66.1	66.1	66.1	52.9	52.9	52.9	52.9	66.1	66.1	52.9
127.6	52.9	52.9	52.9	52.9	52.9	39.7	39.7	52.9	39.7	52.9
111.2	52.9	52.9	52.9	52.9	52.9	39.7	39.7	39.7	39.7	52.9
94.8	52.9	52.9	52.9	52.9	52.9	39.7	39.7	26.5	39.7	39.7
78.4	52.9	52.9	52.9	52.9	52.9	39.7	39.7	26.5	39.7	39.7
62	52.9	52.9	52.9	52.9	52.9	39.7	39.7	26.5	39.7	39.7

Ust) / 6.6 ft - V 63A -

(ft)	82	98	115	131	148	164	180	197	213	230
242.8										
237.2	185.2	172	172	172	172	172	172			
220.8	145.5	145.5	145.5	145.5	132.3	145.5	145.5	145.5	145.5	145.5
204.4	119.1	119.1	119.1	119.1	119.1	105.8	105.8	119.1	119.1	132.3
188	105.8	105.8	105.8	92.6	92.6	92.6	92.6	105.8	105.8	105.8
171.6	92.6	92.6	92.6	79.4	79.4	79.4	79.4	92.6	92.6	92.6
155.2	79.4	79.4	66.1	66.1	66.1	66.1	66.1	79.4	66.1	66.1
138.8	66.1	66.1	52.9	52.9	52.9	52.9	52.9	52.9	52.9	52.9
122.4	52.9	52.9	52.9	52.9	39.7	39.7	39.7	39.7	39.7	52.9
106	52.9	52.9	52.9	52.9	39.7	39.7	39.7	26.5	39.7	39.7
89.6	52.9	52.9	52.9	52.9	39.7	39.7	39.7	26.5	39.7	39.7
73.2	52.9	52.9	52.9	52.9	39.7	39.7	39.7	26.5	39.7	39.7

Ust) / 6.6 ft - ZD 463 -

(ft)	82	98	115	131	148	164	180	197	213	230
166.3							126.8			
161.1	132.3	132.3	126.8	121.3	126.8	121.3	121.3			
155.5	126.8	121.3	121.3	121.3	121.3	110.2	110.2	126.8	126.8	
149.9	121.3	115.7	115.7	115.7	110.2	104.7	104.7	121.3	115.7	115.7
133.5	99.2	104.7	99.2	104.7	93.7	93.7	82.7	99.2	93.7	93.7
117.1	88.2	93.7	88.2	93.7	82.7	82.7	71.7	77.2	77.2	82.7
100.7	88.2	93.7	88.2	93.7	82.7	77.2	66.1	60.6	71.7	82.7
84.3	88.2	93.7	88.2	93.7	82.7	77.2	66.1	60.6	71.7	77.2

Ust) / 6.6 ft - ZX 640 -

(ft)	82	98	115	131	148	164	180	197	213	230
237.2	165.4	165.4	165.4							
231.6	154.3	154.3	154.3	154.3	165.4	154.3	154.3			
226.1	154.3	154.3	154.3	154.3	154.3	154.3	154.3	154.3		
220.8	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	154.3	154.3
204.4	121.3	121.3	121.3	121.3	121.3	121.3	121.3	121.3	132.3	132.3
188	110.2	110.2	110.2	110.2	110.2	99.2	99.2	99.2	110.2	110.2
171.6	88.2	88.2	88.2	88.2	88.2	88.2	88.2	88.2	88.2	88.2
155.2	77.2	77.2	77.2	66.1	77.2	66.1	66.1	66.1	77.2	77.2
138.8	55.1	55.1	55.1	55.1	55.1	55.1	55.1	55.1	55.1	55.1
122.4	44.1	55.1	55.1	55.1	44.1	44.1	33.1	33.1	44.1	44.1
106	44.1	55.1	55.1	55.1	44.1	44.1	33.1	33.1	33.1	44.1
89.6	44.1	55.1	55.1	55.1	44.1	44.1	33.1	33.1	33.1	44.1
73.2	44.1	55.1	55.1	55.1	44.1	44.1	33.1	33.1	33.1	44.1

Load curves



(ft)			66	72	82	89	98	105	115	121	131	138	148	154	164	171	180	187	197	203	213	220	230	ft
230	10 → 67	125 - 135	13.2	12.2	10.6	9.8	8.7	8.1	7.3	6.8	6.6	6.5	6	5.7	5.2	4.9	4.5	4.2	3.9	3.7	3.4	3.2	3	USt
	10 → 69	128 - 138	13.2	12.5	11	10.1	9	8.3	7.5	7	6.6	6.6	6.2	5.9	5.4	5	4.6	4.3	4	3.8	3.5	3.3	3.1	USt P+
213	10 → 70	129 - 138	13.2	12.8	11.1	10.2	9.1	8.4	7.6	7.1	6.6	6.6	6.1	5.8	5.3	5	4.6	4.4	4	3.8	3.6			USt
	10 → 72	132 - 141	13.2	13.2	11.5	10.5	9.3	8.7	7.8	7.3	6.7	6.6	6.3	6	5.5	5.2	4.7	4.5	4.2	3.9	3.7			USt P+
197	10 → 74	137 - 146	13.2	13.2	11.9	10.9	9.7	9	8.1	7.6	7	6.6	6.5	6.2	5.7	5.4	5	4.7	4.4					USt
	10 → 77	140 - 149	13.2	13.2	12.1	11.2	10	9.3	8.4	7.9	7.2	6.8	6.6	6.4	5.9	5.5	5.1	4.8	4.5					USt P+
180	10 → 75	136 - 146	13.2	13.2	12	11	9.7	9	8.1	7.6	6.9	6.6	6.5	6.2	5.8	5.5	5.2							USt
	10 → 77	139 - 149	13.2	13.2	12.3	11.3	10	9.2	8.3	7.8	7.1	6.7	6.6	6.4	5.9	5.7	5.3							USt P+
164	10 → 77	138 - 149	13.2	13.2	12.3	11.2	9.9	9.2	8.3	7.8	7.1	6.6	6.6	6.3	5.9									USt
	10 → 80	144 - 155	13.2	13.2	12.8	11.7	10.4	9.6	8.7	8.1	7.4	7	6.6	6.6	6.2									USt P+
148	10 → 79	143 - 148	13.2	13.2	12.7	11.6	10.3	9.6	8.6	8.1	7.3	6.9	6.6											USt
	10 → 82		13.2	13.2	13.2	12.2	10.8	10	9	8.4	7.7	7.3	6.7											USt P+
131	10 → 81		13.2	13.2	13.1	12	10.6	9.9	8.9	8.3	7.6													USt
	10 → 84		13.2	13.2	13.2	12.4	11	10.2	9.2	8.6	7.9													USt P+
115	10 → 81		13.2	13.2	13	11.9	10.5	9.8	8.8															USt
	10 → 84		13.2	13.2	13.2	12.4	11	10.2	9.2	8.6	7.9													USt P+
98	10 → 81		13.2	13.2	13.1	12	10.6																	USt
	10 → 84		13.2	13.2	13.2	12.5	11.1																	USt P+
82	10 → 80		13.2	13.2	12.7																			USt
	10 → 82		13.2	13.2	13.2																			USt P+

$W_{L2} = W_L - 0.66 \text{ USt max.}$




(ft)			66	72	82	89	98	105	115	121	131	138	148	154	164	171	180	187	197	203	213	220	230	ft
230	8 → 67	126 - 128	13.2	12.2	10.7	9.9	8.8	8.2	7.4	6.9	6.4	6.1	5.6	5.3	4.8	4.5	4.1	3.8	3.5	3.3	3	2.8	2.6	USt
	8 → 69	129 - 131	13.2	12.6	11	10.2	9	8.4	7.6	7.1	6.6	6.2	5.8	5.5	5	4.6	4.2	3.9	3.6	3.4	3.1	2.9	2.65	USt P+
213	8 → 70	130 - 132	13.2	12.9	11.2	10.3	9.1	8.5	7.6	7.2	6.6	6.3	5.7	5.4	5	4.7	4.3	4	3.7	3.5	3.2			USt
	8 → 73	133 - 135	13.2	13.2	11.5	10.6	9.4	8.7	7.9	7.4	6.7	6.4	5.9	5.6	5.1	4.8	4.4	4.1	3.8	3.6	3.3			USt P+
197	8 → 75	138 - 140	13.2	13.2	12	11	9.8	9.1	8.2	7.7	7	6.6	6.2	5.9	5.4	5	4.6	4.4	4					USt
	8 → 77	141 - 143	13.2	13.2	12.2	11.3	10.1	9.4	8.5	7.9	7.2	6.8	6.4	6	5.5	5.2	4.8	4.5	4.2					USt P+
180	8 → 76	137 - 140	13.2	13.2	12	11	9.8	9.1	8.1	7.6	6.9	6.6	6.2	5.9	5.4	5.2	4.8							USt
	8 → 77	140 - 143	13.2	13.2	12.4	11.3	10	9.3	8.4	7.8	7.1	6.7	6.4	6	5.6	5.3	5							USt P+
164	8 → 77	140 - 143	13.2	13.2	12.3	11.3	10	9.3	8.4	7.8	7.1	6.7	6.3	6	5.6									USt
	8 → 80	145 - 148	13.2	13.2	12.9	11.8	10.5	9.7	8.8	8.2	7.5	7	6.6	6.3	5.9									USt P+
148	8 → 80	144 - 148	13.2	13.2	12.8	11.7	10.4	9.6	8.7	8.1	7.4	7	6.6											USt
	8 → 83		13.2	13.2	13.2	12.2	10.9	10.1	9.1	8.5	7.8	7.3	6.7											USt P+
131	8 → 82		13.2	13.2	13.2	12.1	10.7	9.9	8.9	8.4	7.6													USt
	8 → 84		13.2	13.2	13.2	12.5	11.1	10.3	9.3	8.7	7.9													USt P+
115	8 → 81		13.2	13.2	13	11.9	10.6	9.8	8.8															USt
	8 → 84		13.2	13.2	13.2	12.5	11.1	10.3	9.3															USt P+
98	8 → 82		13.2	13.2	13.2	12.1	10.7																	USt
	8 → 85		13.2	13.2	13.2	12.6	11.1																	USt P+
82	8 → 80		13.2	13.2	12.8																			USt
	8 → 82		13.2	13.2	13.2																			USt P+

$W_{L2} = W_L - 0.2 \text{ USt max.}$

Jib weight & counter-jib ballast

TAVAN	(lb) (+/- 5%)								
				10,141 lb	3,373 lb	(lb)	6,768 lb	3,373 lb	(lb)
230 ft	32,587	31,744	32,721	5	2	57,452	8	1	57,519
213 ft	31,916	31,140	32,117	5	2	57,452	8	1	57,519
197 ft	31,070	30,360	31,226	5	2	57,452	8	1	57,519
180 ft	29,211	28,501	29,368	5	0	50,706	7	1	50,750
164 ft	29,527	28,817	29,683	5	0	50,706	7	1	50,750
148 ft	27,902	27,192	28,058	4	2	47,311	7	0	47,377
131 ft	27,324	26,614	27,481	4	1	43,938	6	1	43,982
115 ft	25,536	24,826	25,693	4	0	40,565	6	0	40,609
98 ft	24,209	23,499	24,365	3	2	37,170	5	1	37,214
82 ft	22,192	21,482	22,348	3	1	33,797	5	0	33,841

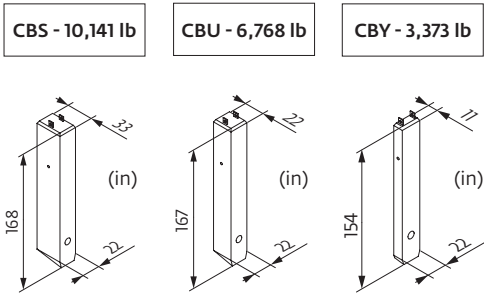













Dimensions and weight

Slewing crane part:  230 ft -  -  -  50 LVF



Slewing crane part			L (ft)	W (ft)	H (ft)	lb (+/- 5%)
Counter-jib		Ⓐ Ⓑ	36.1 36.1	3.7 3.7	8.1 8.1	21,826 20,503
Cab mast + cab		Ultra View	16.1	7.3	8.2	13,228
Towerhead + Hoisting winch (+ rope)		6.6 ft 50 LVF	17.3	8.3	9.2	21,054
Towerhead		6.6 ft	9.7	8.1	8.2	13,228
Hoisting winch (+ rope)		90 HPL™	14	7.5	7.6	9,921
Jib section		① 6 DVF	35.8	5.6	9	9,348
Jib section		③ ⑤ ⑥ ⑦	33.8 33.5 33.6 33.4	3.9 3.9 3.9 3.9	7.9 7.8 6.9 6	5,335 3,439 2,723 1,753
Jib section		② ④ ⑧ ⑨	17.6 17.3 16.7 16.7	3.9 3.9 3.9 3.9	8 7.8 5 4.6	3,164 2,116 683 485
Trolley		13.2 USt	6.1	5	3.4	882
Pulley block		13.2 USt	3.9	1.4	7.6	1,003
Trolley		13.2 USt	5.2	5	3.2	463
Trolley		13.2 USt 6.6 USt	5.6 6.1	5 5	3.4 3.2	540 520
Pulley block		13.2 USt 6.6 USt	5.4 3.6	0.7 0.9	5.8 5.3	992 584


Crane tower			L (ft)	W (ft)	H (ft)	lb (+/- 5%)
Telescopic cage T 61		□ 6.6 ft	35.5	13.6	14.7	21,385
K 649B KM 649E KRM 6410B		□ 6.6 ft	33.6 33.8 33.6	6.8 6.7 6.9	6.7 6.7 6.8	11,663 10,692 15,653
KR 649A KRMT 649A K 649A KMT 649A		□ 6.6 ft	17.2 17.2 17.2 17.2	6.9 6.9 6.8 6.8	6.8 6.8 6.7 6.7	7,165 6,724 6,184 5,666
K 649C KMT 649C KRMT 649C		□ 6.6 ft	11.7 11.7 11.7	6.8 6.8 6.9	6.7 6.7 6.8	4,376 4,542 5,401
Fixing angles		P 63A / P 800B	2.5	2.5	4.2	1,025
Basic mast unit		V 60A V 63A	16.4 32.9	7.9 7.9	7.9 7.9	10,494 16,887
Struts		V 60A V 63A	14.8 14.8	1 1.1	1 1.1	1,036 1,235
Half-bearer		V 60A V 63A	22 22	2.3 2.3	7.6 7.6	4,057 4,101
Cross girder		ZD 463	25.1	3.8	4.5	7,904
1/2 Cross girder		ZD 463	11.2	2.3	4.4	3,649
1/2 Cross girder		ZX 640	14.3	3.3	5.1	7,319
Cross girder		ZX 640	30	3.9	5.1	15,168

Mechanisms

480 V - 60 Hz											hp	kW			
	50 LVF 30 Optima	fpm	105	135	185	267	54	71	97	135	50	37	1,106 ft		
		USt	6.6	5	3.3	1.1	13.2	9.9	6.6	2.5					
	90 HPL™ 30	fpm	176	228	326	469	723	90	120	172	244	361	90	66	2,772 ft
		USt	6.6	5	3.3	1.7	0.2	13.2	9.9	6.6	3.3	0.9			
	6 DVF 4 Optima	fpm	0 → 164 (13.2 USt) 0 → 328 (6.6 USt) 0 → 394 (3.3 USt)								5.5	4			
	RVF 162 Optima+	rpm					0 → 0.9				2 x 7.5	2 x 5.5			

480 V (+6% -10%) 60 Hz	50 LVF: 58 → 38 kVA 90 HPL™: 90 → 54 kVA	

50 LVF 30 Optima



These most combinations meet the EN 14439 and ASME B30.3-2016 specifications for “out of service” wind conditions, provided the illustrated wind speed matches required design wind speed for the location of the tower crane. The “out of service” design wind speed was determined in accordance with ASCE 7-10, Figure 26.5-1A. The wind velocity, used for this configuration was 98 mph (158 kph), which represents a nominal design 3-second wind gust at 33 ft (10 m) above ground for Exposure B category. A factor of 0.85 was applied to the 700-year ultimate design wind speed of 115 mph (185 kph), per ASCE 37-02, with the assumption that this crane is considered a temporary structure used during a construction period of 2 years or less.

- Jib elevation
- Total ballast weight
- Travelling
- Standard equipment
- Jib weight
- Required power
- Options
- Lorry 44 ft
- Power Control Function: wind speeds adapted to the available power
- Potain Plus function: Plus load curves
- Container High Cube 40 ft, and/or Flat Rack 20 ft
- Consult us
- Hook heights with Plus load curves
- Hoisting
- Reactions in service
- Trolleying
- Reactions out of service
- Slewing

This commercial document is not legally binding. For any technical information, please refer to the corresponding instructions.

